

KEXU



CONTACT INFORMATION

- 📍 Add: No. 2662, Qiaoli Road, Changshui Subdistrict, Economic & Technological Development Zone, Jiaxing City, Zhejiang Province, China
- ✉ E-mail: sales@kexufan.com
- 📞 Mobile: +86-137-3828-2779
- 📱 WhatsApp: +86-137-3828-2779

UL CE SGS RoHS

AC DC EC FANS

PRODUCT CATALOGUE

COMPANY PROFILE

Jiaxing Kexu Electric Co., Ltd. is located in Zhejiang, China, with convenient transportation access. The factory covers 7,000 m² (≈75,000 sq ft) and operates three modern assembly lines.

We specialize in cooling fan solutions, offering a wide range of products including AC axial fans, DC axial fans, EC fans, centrifugal fans, and fan accessories. Our products are certified by UL, CE, RoHS, and 3C, and are exported to more than 40 countries and regions worldwide. They are widely applied in automation, power & energy, energy storage, industrial refrigeration, control cabinets, and industrial equipment.

Our key advantages include modern automated production lines, stable quality and consistent performance, customization options (voltage, size, airflow, IP rating, labeling), reliable lead times with flexible cooperation models, and strong after-sales support.



ENTERPRISE DISPLAY



APPLICATION FIELDS



PRODUCT

CATALOGUE

产品目录

AC Axial Fan/AC轴流风扇

80*80*25 mm	05
80*80*38 mm	06
92*92*25 mm	07
92*92*38 mm	08
110*110*25 mm	09
120*120*25 mm	10
120*120*38 mm -5P	11
120*120*38 mm -7P	12
150*150*50 mm	13
172*150*38 mm	14
172*150*51 mm -5P	15
172*150*51 mm -7P	16
Φ172*51 mm	17
172*150*51 mm -C	18
160*160*60 mm	19
160*160*62 mm	20
180*180*65 mm	21
200*200*60 mm	22
210*210*70 mm	23
Φ220*60 mm	24
Φ254*89 mm -3P	25

AC All Metal Fan/AC 全金属风扇

172*150*55 mm	26
205*205*72 mm	27
225*225*80 mm	28
Φ254*89 mm -7P	29
280*280*80 mm	30

AC External Rotor Fan/AC 外转子风扇

YWF-250-7P	31
YWF-300-7P	32
YWF-350-5P	33
YWF-400-5P	34
YWF-450-5P	35
YWF-500-5P	36
YWF-600-5P	37
YWF-630-5P	38

AC Centrifugal Fan/AC 离心风机

180-49	39
190-63	40
220-64	41
225-89	42

DC Axial Fan/DC轴流风扇

60*60*25 mm	43
60*60*38 mm	44
80*80*25 mm	45
80*80*38 mm	46
92*92*25 mm	47
92*92*38 mm	48
120*120*25 mm	49
120*120*38 mm	50
172*150*38 mm	51
172*150*51 mm	52
200*200*60 mm	53

EC Axial Fan/EC轴流风扇

60*60*25 mm	54
80*80*25 mm	55
80*80*38 mm	56
92*92*25 mm	57
92*92*38 mm	58
120*120*25 mm	59
120*120*38 mm	60
172*150*51 mm	61

Fan Guard/过滤网系列

Fan Guard	62-76
-----------	-------


8025 AC FAN

尺寸 Size	80mmx80mmx25mm
风量 Airflow	19-23CFM
重量 Weight	260g
噪音 Noise	23-26dB(A)
风叶 Impeller Material	PBT UL94-V0
外框 Frame	Aluminum Alloy
端子 Terminals	0.5mm
引线 Lead Wire	AWG#22 UL1569(Optional)
马达 Motor	Shaded Pole Induction Motor
温度范围 Operating Temperature	-10°C~+65°C




产品型号 Model	轴承形式 Bearing System	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	噪音 Noise	风量 Air Flow	相数 Phase	电容 Capacitor
		VAC	Hz	A	W	RPM	dB(A)	CFM		μF/VAC
HB8025HA ₁ S	Sleeve	100/125	50/60	0.15	15/12	2300/2750	26/23	19/23	1	/
HB8025HA ₂ S		200/240	50/60	0.09	15/12	2300/2750	26/23	19/23	1	/
HB8025HA ₁ B	Ball	100/125	50/60	0.15	15/12	2300/2750	26/23	19/23	1	/
HB8025HA ₂ B		200/240	50/60	0.09	15/12	2300/2750	26/23	19/23	1	/

■ 外观尺寸 (mm)
Dimensions (mm)

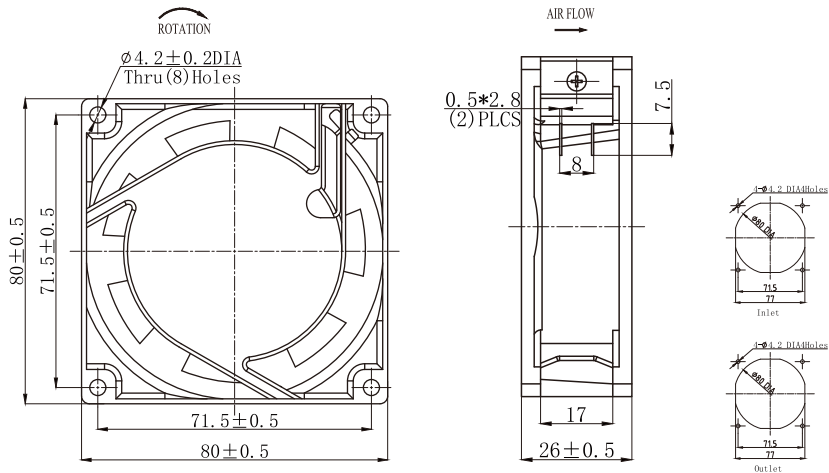

■ P-Q曲线
P-Q Curve

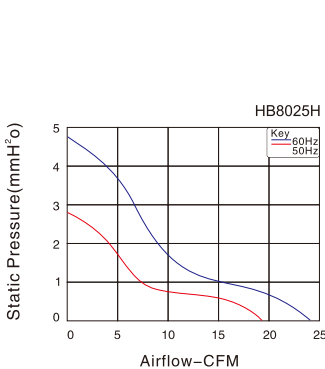

*For any customized design requirements regarding the above products, please contact KEXU sales


8038 AC FAN

尺寸 Size	80mmx80mmx38mm
风量 Airflow	22-28CFM
重量 Weight	275g
噪音 Noise	26-32dB(A)
风叶 Impeller Material	PBT UL94-V0
外框 Frame	Aluminum Alloy
端子 Terminals	0.5mm
引线 Lead Wire	AWG#22 UL1569(Optional)
马达 Motor	Shaded Pole Induction Motor
温度范围 Operating Temperature	-10°C~+65°C




产品型号 Model	轴承形式 Bearing System	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	噪音 Noise	风量 Air Flow	相数 Phase	电容 Capacitor
		VAC	Hz	A	W	RPM	dB(A)	CFM		μF/VAC
HB8038HA ₁ S	Sleeve	100/125	50/60	0.2	9.5/7	2550/3100	28/32	23/28	1	/
HB8038HA ₂ S		200/240	50/60	0.06/0.05	9.5/7	2550/3100	28/32	23/28	1	/
HB8038HA ₁ B	Ball	100/125	50/60	0.2	9.5/7	2550/3100	28/32	23/28	1	/
HB8038HA ₂ B		200/240	50/60	0.06/0.05	9.5/7	2550/3100	28/32	23/28	1	/
HB8038MA ₁ S	Sleeve	100/125	50/60	0.13	9/7	2300/2700	26/30	22/26	1	/
HB8038MA ₂ S		200/240	50/60	0.065	7/6	2300/2700	26/30	22/26	1	/
HB8038MA ₁ B	Ball	100/125	50/60	0.13	9/7	2300/2700	26/30	22/26	1	/
HB8038MA ₂ B		200/240	50/60	0.065	7/6	2300/2700	26/30	22/26	1	/

■ 外观尺寸 (mm)
Dimensions (mm)

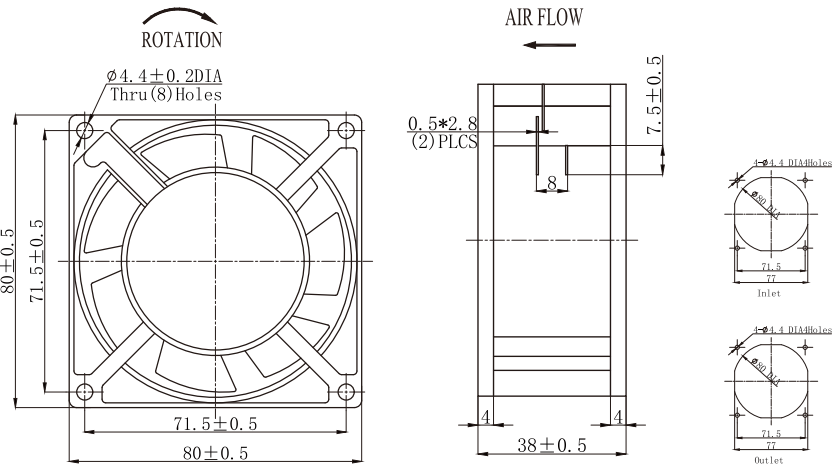

■ P-Q曲线
P-Q Curve

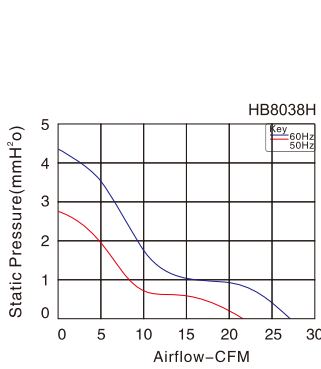

*For any customized design requirements regarding the above products, please contact KEXU sales


9225 AC FAN

尺寸 Size	92mmx92mmx25mm
风量 Airflow	23-37CFM
重量 Weight	268g
噪音 Noise	23-40dB(A)
风叶 Impeller Material	PBT UL94-V0
外框 Frame	Aluminum Alloy
端子 Terminals	0.5mm
引线 Lead Wire	AWG#22 UL1569(Optional)
马达 Motor	Shaded Pole Induction Motor
温度范围 Operating Temperature	-10°C~+65°C




产品型号 Model	轴承形式 Bearing System	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	噪音 Noise	风量 Air Flow	相数 Phase	电容 Capacitor
		VAC	Hz	A	W	RPM	dB(A)	CFM		μF/VAC
HB9225HA ₁ S	Sleeve	100/125	50/60	0.2/0.16	16/13	2350/2800	34/40	30/37	1	/
HB9225HA ₂ S		200/240	50/60	0.1/0.08	16/13	2350/2800	34/40	30/37	1	/
HB9225HA ₁ B	Ball	100/125	50/60	0.2/0.16	13/11	2350/2800	34/40	30/37	1	/
HB9225HA ₂ B		200/240	50/60	0.1/0.08	13/11	2350/2800	34/40	30/37	1	/
HB9225MA ₁ B	Sleeve	100/125	50/60	0.14	7/6	1800/2300	23/30	23/30	1	/
HB9225MA ₂ B		200/240	50/60	0.07	7/6	1800/2300	23/30	23/30	1	/
HB9225MA ₁ B	Ball	100/125	50/60	0.14	7/6	1800/2300	23/30	23/30	1	/
HB9225MA ₂ B		200/240	50/60	0.07	7/6	1800/2300	23/30	23/30	1	/

■ 外观尺寸 (mm)
Dimensions (mm)

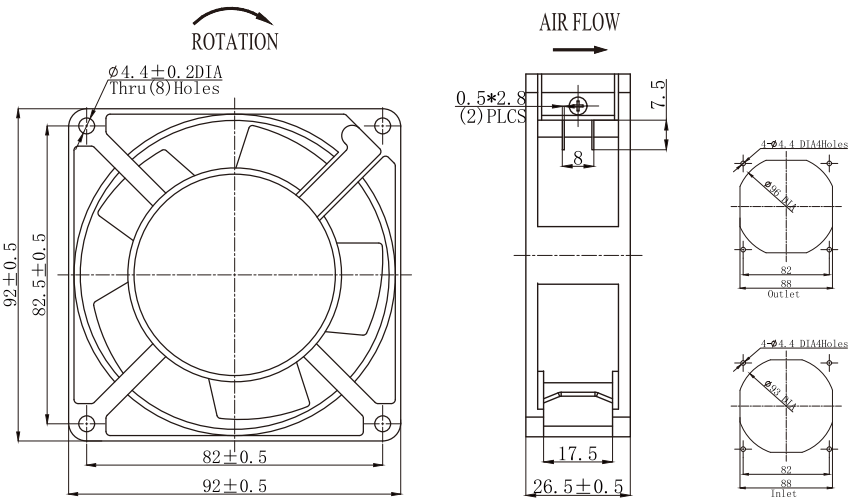

■ P-Q曲线
P-Q Curve

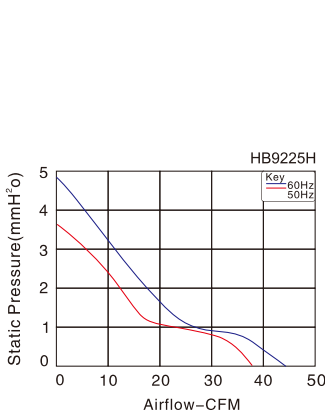

*For any customized design requirements regarding the above products, please contact KEXU sales


9238 AC FAN

尺寸 Size	92mmx92mmx38mm
风量 Airflow	38-46CFM
重量 Weight	360g
噪音 Noise	26-31dB(A)
风叶 Impeller Material	PBT UL94-V0
外框 Frame	Aluminum Alloy
端子 Terminals	0.5mm
引线 Lead Wire	AWG#22 UL1569(Optional)
马达 Motor	Shaded Pole Induction Motor
温度范围 Operating Temperature	-10°C~+65°C




产品型号 Model	轴承形式 Bearing System	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	噪音 Noise	风量 Air Flow	相数 Phase	电容 Capacitor
		VAC	Hz	A	W	RPM	dB(A)	CFM		μF/VAC
HB9238HA ₁ S	Sleeve	100/125	50/60	0.23/0.18	17/13	2350/2750	26/31	39/46	1	/
HB9238HA ₂ S		200/240	50/60	0.06/0.05	10/8	2350/2750	26/31	39/46	1	/
HB9238HA ₁ B	Ball	100/125	50/60	0.23/0.18	17/13	2350/2750	26/31	39/46	1	/
HB9238HA ₂ B		200/240	50/60	0.06/0.05	10/8	2350/2750	26/31	39/46	1	/
HB9238MA ₁ S	Sleeve	100/125	50/60	0.12/0.09	9/7	2250/2600	26/28	38/44	1	/
HB9238MA ₂ S		200/240	50/60	0.07/0.06	11/8	2250/2600	26/28	38/44	1	/
HB9238MA ₁ B	Ball	100/125	50/60	0.12/0.09	9/7	2250/2600	26/28	38/44	1	/
HB9238MA ₂ B		200/240	50/60	0.07/0.06	11/8	2250/2600	26/28	38/44	1	/

■ 外观尺寸 (mm)
Dimensions (mm)

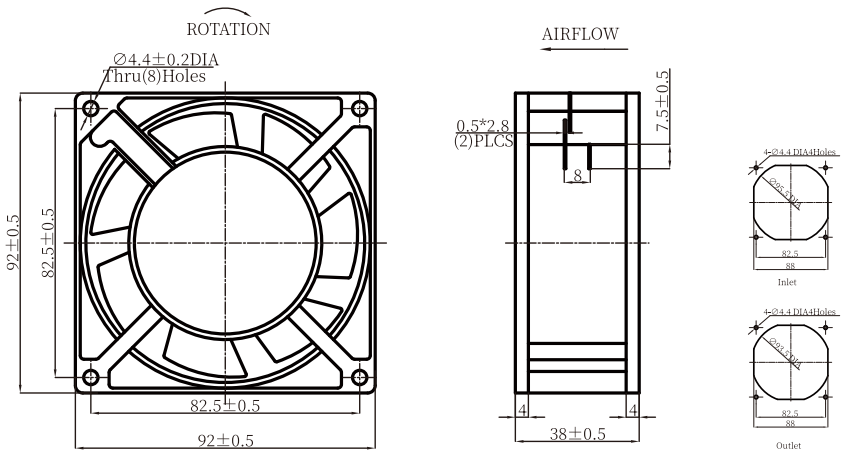

■ P-Q曲线
P-Q Curve

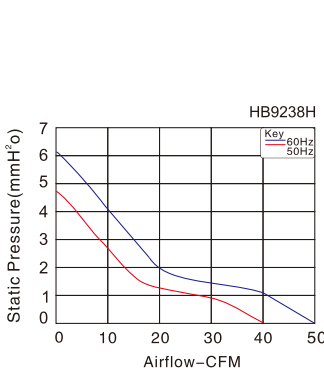

*For any customized design requirements regarding the above products, please contact KEXU sales


11025 AC FAN

尺寸 Size	110mmx110mmx25mm
风量 Airflow	45-71CFM
重量 Weight	310g
噪音 Noise	27-38dB(A)
风叶 Impeller Material	PBT UL94-V0
外框 Frame	Aluminum Alloy
端子 Terminals	0.5mm
引线 Lead Wire	AWG#22 UL1569(Optional)
马达 Motor	Shaded Pole Induction Motor
温度范围 Operating Temperature	-10°C~+65°C




产品型号 Model	轴承形式 Bearing System	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	噪音 Noise	风量 Air Flow	相数 Phase	电容 Capacitor
		VAC	Hz	A	W	RPM	dB(A)	CFM		μF/VAC
HB11025HA ₁ S	Sleeve	100/125	50/60	0.25/0.23	22/19	2450/2900	36/38	60/71	1	/
HB11025HA ₂ S		200/240	50/60	0.1/0.08	17/13	2450/2900	36/38	60/71	1	/
HB11025HA ₁ B	Ball	100/125	50/60	0.25/0.23	22/19	2450/2900	36/38	60/71	1	/
HB11025HA ₂ B		200/240	50/60	0.1/0.08	17/13	2450/2900	36/38	60/71	1	/
HB11025MA ₁ B	Sleeve	100/125	50/60	0.16/0.15	16/15	2000/2000	33/33	52/52	1	/
HB11025MA ₂ B		200/240	50/60	0.07/0.07	16/15	2000/2000	33/33	52/52	1	/
HB11025MA ₁ B	Ball	100/125	50/60	0.16/0.15	16/15	2000/2000	33/33	52/52	1	/
HB11025MA ₂ B		200/240	50/60	0.08/0.08	19/18	2000/2000	33/33	60/71	1	/
HB11025LA ₁ S	Sleeve	100/125	50/60	0.13/0.11	14/13	1800/1700	28/27	46/45	1	/
HB11025LA ₂ B		200/240	50/60	0.05/0.05	14/13	1800/1700	28/27	46/45	1	/
HB11025LA ₁ S	Ball	100/125	50/60	0.13/0.11	14/13	1800/1700	28/27	46/45	1	/
HB11025LA ₂ B		200/240	50/60	0.05/0.05	14/13	1800/1700	28/27	46/45	1	/

■ 外观尺寸 (mm)
Dimensions (mm)

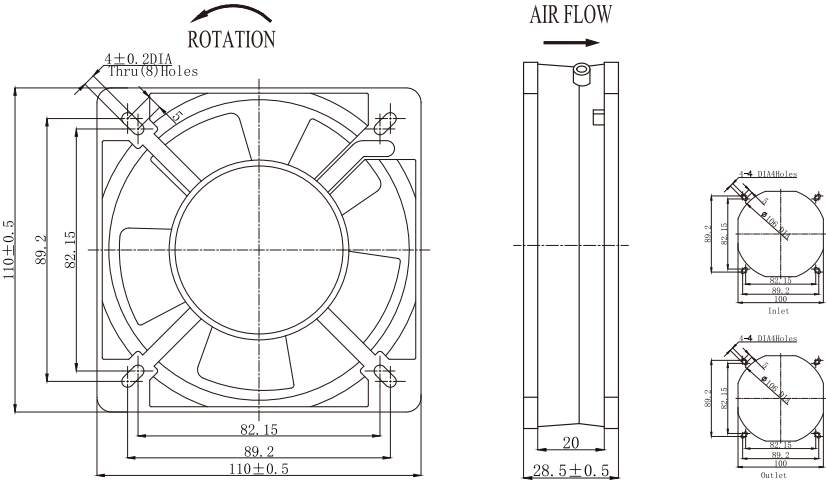

■ P-Q曲线
P-Q Curve

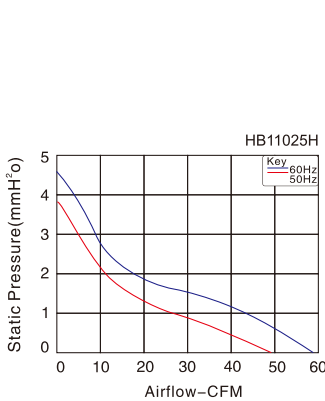

*For any customized design requirements regarding the above products, please contact KEXU sales


12025 AC FAN

尺寸 Size	120mmx120mmx25mm
风量 Airflow	50-76CFM
重量 Weight	350g
噪音 Noise	31-41dB(A)
风叶 Impeller Material	PBT UL94-V0
外框 Frame	Aluminum Alloy
端子 Terminals	0.5mm
引线 Lead Wire	AWG#22 UL1569(Optional)
马达 Motor	Shaded Pole Induction Motor
温度范围 Operating Temperature	-10°C~+65°C




产品型号 Model	轴承形式 Bearing System	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	噪音 Noise	风量 Air Flow	相数 Phase	电容 Capacitor
		VAC	Hz	A	W	RPM	dB(A)	CFM		μF/VAC
HB12025HA ₁ S	Sleeve	100/125	50/60	0.32/0.28	26/32	2350/2650	34/39	59/68	1	/
HB12025HA ₂ S		200/240	50/60	0.07	14/13	2350/2650	34/39	59/68	1	/
HB12025HA ₁ B	Ball	100/125	50/60	0.32/0.28	26/32	2450/2700	39/41	68/76	1	/
HB12025HA ₂ B		200/240	50/60	0.07	14/13	2450/2700	39/41	68/76	1	/
HB12025MA ₁ S	Sleeve	100/125	50/60	0.13	11/10	2000/2200	33/34	55/65	1	/
HB12025MA ₂ S		200/240	50/60	0.06	11/10	2000/2200	33/34	55/65	1	/
HB12025MA ₁ B	Ball	100/125	50/60	0.13	11/10	2000/2200	33/34	55/65	1	/
HB12025MA ₂ B		200/240	50/60	0.06	11/10	2000/2200	33/34	55/65	1	/
HB12025LA ₁ S	Sleeve	100/125	50/60	0.09	9/8	1800/1800	31/31	50/50	1	/
HB12025LA ₂ S		200/240	50/60	0.05	9/8	1800/1800	31/31	50/50	1	/
HB12025LA ₁ B	Ball	100/125	50/60	0.09	9/8	1800/1800	31/31	50/50	1	/
HB12025LA ₂ B		200/240	50/60	0.05	9/8	1800/1800	31/31	50/50	1	/

■ 外观尺寸 (mm)
Dimensions (mm)

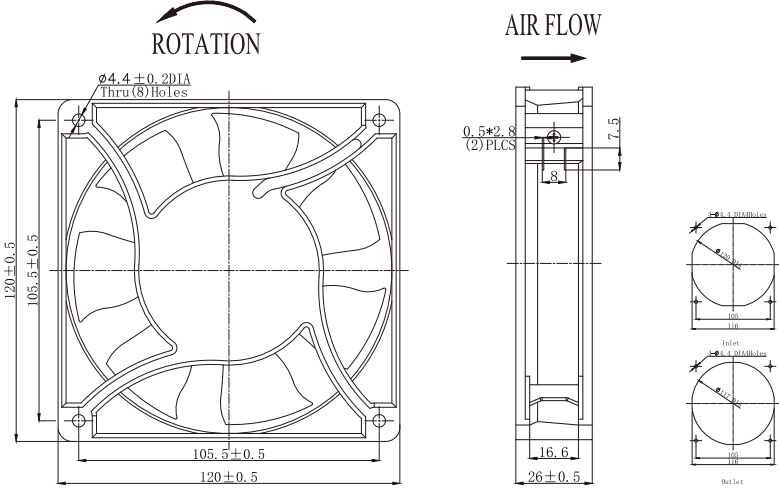

■ P-Q曲线
P-Q Curve

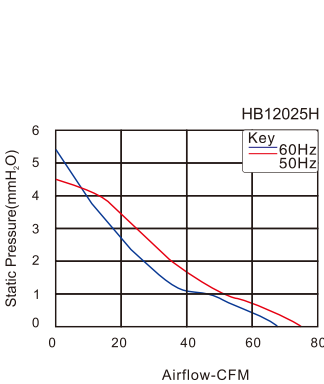

*For any customized design requirements regarding the above products, please contact KEXU sales


12038-5P AC FAN

尺寸 Size	120mmx120mmx38mm
风量 Airflow	76-98CFM
重量 Weight	480g
噪音 Noise	39-48dB(A)
风叶 Impeller Material	PBT UL94-V0
外框 Frame	Aluminum Alloy
端子 Terminals	0.5mm
引线 Lead Wire	AWG#22 UL1569(Optional)
马达 Motor	Shaded Pole Induction Motor
温度范围 Operating Temperature	-10°C~+65°C




产品型号 Model	轴承形式 Bearing System	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	噪音 Noise	风量 Air Flow	相数 Phase	电容 Capacitor
		VAC	Hz	A	W	RPM	dB(A)	CFM		μF/VAC
HB12038HA ₁ S	Sleeve	100/125	50/60	0.4/0.33	23/30	2600/3000	43/48	93/98	1	/
HB12038HA ₂ S		200/240	50/60	0.15/0.12	21/18	2600/3000	43/48	93/98	1	/
HB12038HA ₃ B		380/420	50/60	0.1	21	2600/3000	43/48	93/98	1	/
HB12038HA ₁ B	Ball	100/125	50/60	0.4/0.33	23/30	2600/3000	43/48	93/98	1	/
HB12038HA ₂ S		200/240	50/60	0.15/0.12	21/18	2600/3000	43/48	93/98	1	/
HB12038HA ₃ S		380/420	50/60	0.1	21	2600/3000	43/48	93/98	1	/
HB12038MA ₁ S	Sleeve	100/125	50/60	0.24	18	2200/2600	39/44	76/94	1	/
HB12038MA ₂ S		200/240	50/60	0.11	19	2200/2600	39/44	76/94	1	/
HB12038MA ₁ B	Ball	100/125	50/60	0.22	19	2200/2600	39/44	76/94	1	/
HB12038MA ₂ B		200/240	50/60	0.11	19	2200/2600	39/44	76/94	1	/

■ 外观尺寸 (mm)
Dimensions (mm)

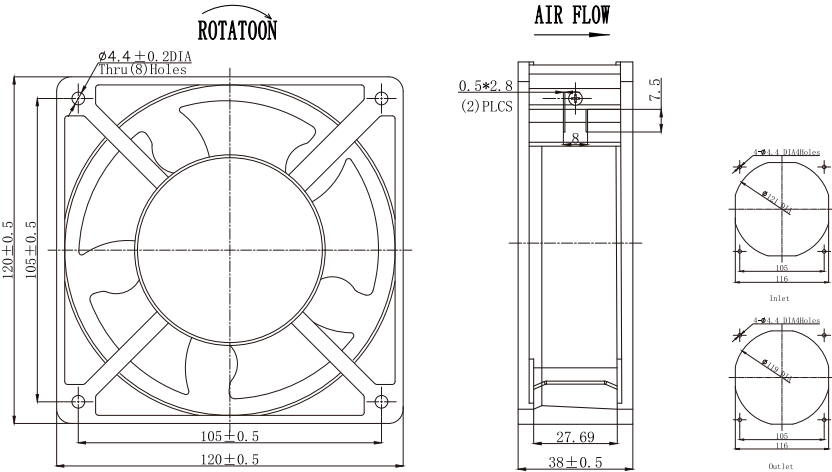

■ P-Q曲线
P-Q Curve



*For any customized design requirements regarding the above products, please contact KEXU sales



12038-7P AC FAN

尺寸 Size	120mmx120mmx38mm
风量 Airflow	78-112CFM
重量 Weight	490g
噪音 Noise	35-44dB(A)
风叶 Impeller Material	PBT UL94-V0
外框 Frame	Aluminum Alloy
端子 Terminals	0.5mm
引线 Lead Wire	AWG#22 UL1569(Optional)
马达 Motor	Shaded Pole Induction Motor
温度范围 Operating Temperature	-10°C~+65°C



产品型号 Model	轴承形式 Bearing System	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	噪音 Noise	风量 Air Flow	相数 Phase	电容 Capacitor
		VAC	Hz	A	W	RPM	dB(A)	CFM		μF/VAC
HB12038HA ₁ S-7P	Sleeve	100/125	50/60	0.30	31/23	2600/3000	39/44	99/112	1	/
HB12038HA ₂ S-7P		200/240	50/60	0.18/0.15	25/26	2600/3000	39/44	99/112	1	/
HB12038HA ₁ B-7P	Ball	100/125	50/60	0.30	29/24	2600/3000	39/44	99/112	1	/
HB12038HA ₂ B-7P		200/240	50/60	0.18/0.15	25/26	2600/3000	39/44	99/112	1	/
HB12038MA ₁ S-7P	Sleeve	100/125	50/60	0.25	19/17	2450/2700	38/42	91/100	1	/
HB12038MA ₂ S-7P		200/240	50/60	0.16	16/15	2450/2700	38/42	91/100	1	/
HB12038MA ₁ B-7P	Ball	100/125	50/60	0.25	19/17	2450/2700	39/42	91/100	1	/
HB12038MA ₂ B-7P		200/240	50/60	0.16	16/15	2450/2700	39/42	91/100	1	/
HB12038LA ₁ S-7P	Sleeve	100/125	50/60	0.20	14/13	2100/2400	35/40	78/91	1	/
HB12038LA ₂ S-7P		200/240	50/60	0.10	12/11	2100/2450	35/40	78/91	1	/
HB12038LA ₁ B-7P	Ball	100/125	50/60	0.20	14/13	2100/2450	35/38	78/91	1	/
HB12038LA ₂ B-7P		200/240	50/60	0.10	12/11	2100/2450	35/38	78/91	1	/

■ 外观尺寸 (mm)
Dimensions (mm)

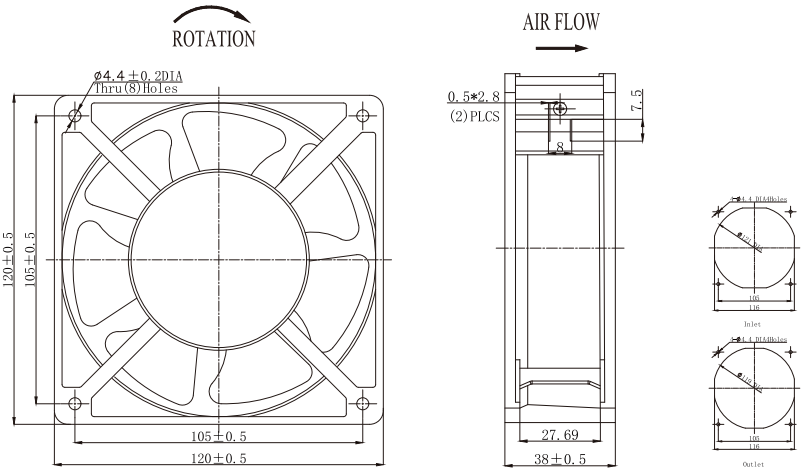

*For any customized design requirements regarding the above products, please contact KEXU sales

15050 AC FAN

尺寸 Size150mmx150mmx50mm

风量 Airflow170-210CFM

重量 Weight850g

噪音 Noise49-59dB(A)

风叶 Impeller MaterialPBT UL94-V0

外框 FrameAluminum Alloy

端子 Terminals0.5mm

引线 Lead WireAWG#22 UL1569(Optional)


马达 MotorShaded Pole Induction Motor

温度范围 Operating Temperature-10℃~+65℃




产品型号 Model	轴承形式 Bearing System	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	噪音 Noise	风量 Air Flow	相数 Phase	电容 Capacitor
		VAC	Hz	A	W	RPM	dB(A)	CFM		μF/VAC
HB15050HA ₁ S	Sleeve	100/125	50/60	0.40	38	2600/2900	53/59	190/210	1	/
HB15050HA ₂ S		200/240	50/60	0.19	25	2600/2900	53/59	190/210	1	/
HB15050HA ₃ S		380/420	50/60	0.12	38	2600/2900	53/59	190/210	1	/
HB15050HA ₁ B	Ball	100/125	50/60	0.40	38	2600/2900	53/59	190/210	1	/
HB15050HA ₂ B		200/240	50/60	0.19	25	2600/2900	53/59	190/210	1	/
HB15050HA ₃ B		380/420	50/60	0.12	38	2600/2900	53/59	190/210	1	/
HB15050MA ₁ S	Sleeve	100/125	50/60	0.35	35	2200/2600	49/54	190/210	1	/
HB15050MA ₂ S		200/240	50/60	0.19	35	2200/2600	49/54	170/190	1	/
HB15050MA ₃ S		380/420	50/60	0.12	35	2200/2600	49/54	170/190	1	/
HB15050MA ₁ B	Ball	100/125	50/60	0.35	35	2200/2600	49/54	170/190	1	/
HB15050MA ₂ B		200/240	50/60	0.19	35	2200/2600	49/54	170/190	1	/
HB15050MA ₃ B		380/420	50/60	0.05/0.07	22/18	2350/2600	49/54	170/190	1	/

■ 外观尺寸 (mm)
Dimensions (mm)

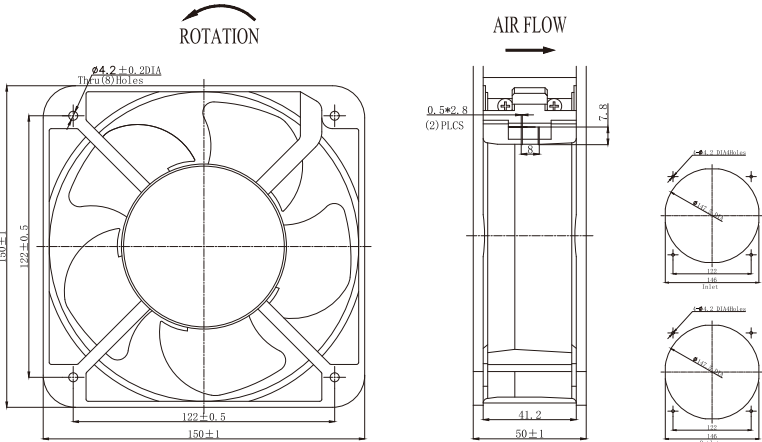

■ P-Q曲线
P-Q Curve



*For any customized design requirements regarding the above products, please contact KEXU sales

17238-C AC FAN

尺寸 Size172mmx150mmx38mm

风量 Airflow85-230CFM

重量 Weight750g

噪音 Noise38-58dB(A)

风叶 Impeller MaterialPBT UL94-V0

外框 FrameAluminum Alloy

端子 Terminals0.5mm

引线 Lead WireAWG#22 UL1569(Optional)


马达 MotorShaded Pole Induction Motor

温度范围 Operating Temperature-10℃~+65℃




产品型号 Model	轴承形式 Bearing System	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	噪音 Noise	风量 Air Flow	相数 Phase	电容 Capacitor
		VAC	Hz	A	W	RPM	dB(A)	CFM		μF/VAC
HB17238HA ₁ B-C	Sleeve	100/125	50/60	0.35/0.33	34/33	2850/3300	54/58	185/211	1	/
HB17238HA ₂ B-C		200/240	50/60	0.13/0.13	27/28	2850/3300	54/58	195/230	1	/
HB17238HA ₆ B-C		380/420	50/60	0.08/0.09	31/36	2850/3300	54/58	195/230	1	/
HB17238MA ₁ B-C	Ball	100/125	50/60	0.17/0.18	28/29	2500/2800	52/57	146/165	1	/
HB17238MA ₂ B-C		200/240	50/60	0.11/0.12	28/29	2500/2800	52/57	146/165	1	/
HB17238MA ₆ B-C		380/420	50/60	0.17/0.18	28/27	2500/2800	52/57	146/165	1	/
HB17238LA ₁ B-C	Sleeve	100/125	50/60	0.17/0.15	29/28	1400/1700	38/44	85/103	1	/
HB17238LA ₃ B-C		200/240	50/60	0.08/0.07	27/26	1400/1700	38/44	85/103	1	/

■ 外观尺寸 (mm)
Dimensions (mm)

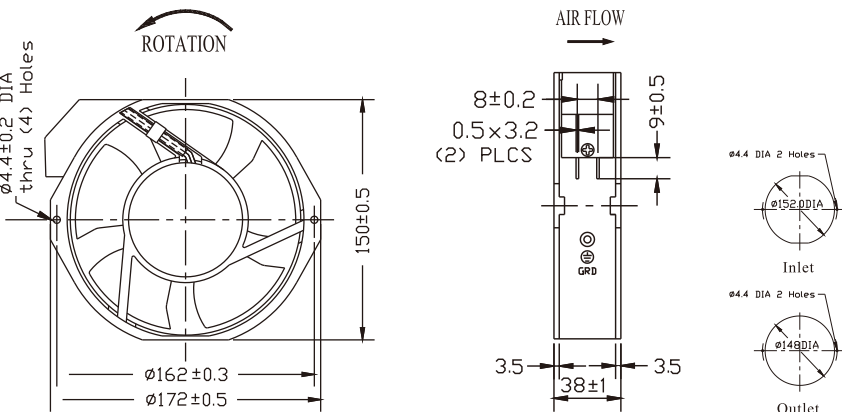

■ P-Q曲线
P-Q Curve



*For any customized design requirements regarding the above products, please contact KEXU sales


17050-5P AC FAN

尺寸 Size 172mmx150mmx51mm
风量 Airflow 105-235CFM
重量 Weight 820g
噪音 Noise 30-50dB(A)
风叶 Impeller Material PBT UL94-V0
外框 Frame Aluminum Alloy
端子 Terminals 0.5mm
引线 Lead Wire AWG#22 UL1569(Optional)
马达 Motor Shaded Pole Induction Motor
温度范围 Operating Temperature -10°C~+65°C




产品型号 Model	轴承形式 Bearing System	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	噪音 Noise	风量 Air Flow	相数 Phase	电容 Capacitor
		VAC	Hz	A	W	RPM	dB(A)	CFM		μF/VAC
HB17050HA ₁ S	Sleeve	100/125	50/60	0.50/0.45	37/36	2700/3100	45/50	190/235	1	/
HB17050HA ₂ S		200/240	50/60	0.22/0.21	34/33	2700/3100	45/50	190/235	1	/
HB17050HA ₁ B	Ball	100/125	50/60	0.50/0.45	37/36	2700/3100	45/50	190/235	1	/
HB17050HA ₂ B		200/240	50/60	0.22/0.21	34/33	2700/3100	45/50	190/235	1	/
HB17050MA ₁ S	Sleeve	100/125	50/60	0.41/0.39	32/30	2400/2300	41/40	170/160	1	/
HB17050MA ₂ S		200/240	50/60	0.19/0.18	30/28	2400/2300	41/40	170/160	1	/
HB17050MA ₁ B	Ball	100/125	50/60	0.41/0.39	32/30	2400/2300	41/40	170/160	1	/
HB17050MA ₂ B		200/240	50/60	0.19/0.18	30/28	2400/2300	41/40	170/160	1	/
HB17050LA ₁ S	Sleeve	100/125	50/60	0.35/0.35	26/25	1900/1500	32/30	125/105	1	/
HB17050LA ₂ S		200/240	50/60	0.16/0.16	26/25	1900/1500	32/30	125/105	1	/
HB17050LA ₁ B	Ball	100/125	50/60	0.35/0.35	26/25	1900/1500	32/30	125/105	1	/
HB17050LA ₂ S		200/240	50/60	0.16/0.16	26/25	1900/1500	32/30	125/105	1	/

■ 外观尺寸 (mm)
Dimensions (mm)

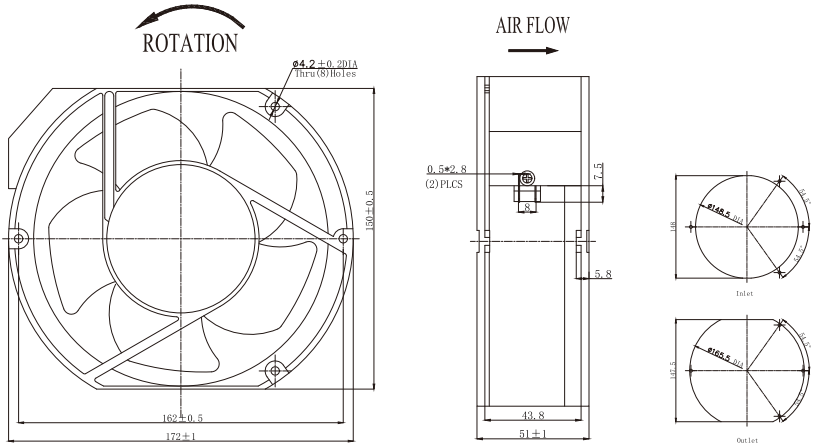

■ P-Q曲线
P-Q Curve

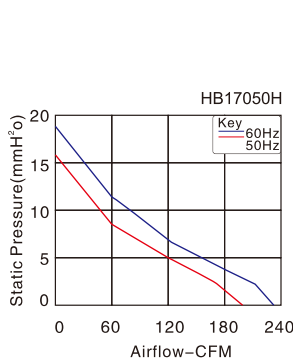

*For any customized design requirements regarding the above products, please contact KEXU sales


17050-7P AC FAN

尺寸 Size 172mmx150mmx51mm
风量 Airflow 115-245CFM
重量 Weight 850g
噪音 Noise 30-52dB(A)
风叶 Impeller Material PBT UL94-V0
外框 Frame Aluminum Alloy
端子 Terminals 0.5mm
引线 Lead Wire AWG#22 UL1569(Optional)
马达 Motor Shaded Pole Induction Motor
温度范围 Operating Temperature -10°C~+65°C




产品型号 Model	轴承形式 Bearing System	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	噪音 Noise	风量 Air Flow	相数 Phase	电容 Capacitor
		VAC	Hz	A	W	RPM	dB(A)	CFM		μF/VAC
HB17050HA ₁ S-7P	Sleeve	100/125	50/60	0.50/0.45	37/36	2700/3100	46/52	200/245	1	/
HB17050HA ₂ S-7P		200/240	50/60	0.22/0.21	34/33	2700/3100	46/52	200/245	1	/
HB17050HA ₁ B-7P	Ball	100/125	50/60	0.50/0.45	37/36	2700/3100	46/52	200/245	1	/
HB17050HA ₂ B-7P		200/240	50/60	0.22/0.21	34/33	2700/3100	46/52	200/245	1	/
HB17050MA ₁ S-7P	Sleeve	100/125	50/60	0.41/0.39	32/30	2400/2300	43/42	178/166	1	/
HB17050MA ₂ S-7P		200/240	50/60	0.19/0.18	30/28	2400/2300	43/42	178/166	1	/
HB17050MA ₁ B-7P	Ball	100/125	50/60	0.41/0.39	32/30	2400/2300	43/42	178/166	1	/
HB17050MA ₂ B-7P		200/240	50/60	0.19/0.18	30/28	2400/2300	43/42	178/166	1	/
HB17050LA ₁ S-7P	Sleeve	100/125	50/60	0.35/0.35	26/25	1900/1500	35/30	130/115	1	/
HB17050LA ₂ S-7P		200/240	50/60	0.16/0.16	26/25	1900/1500	35/30	130/115	1	/
HB17050LA ₁ B-7P	Ball	100/125	50/60	0.35/0.35	26/25	1900/1500	35/30	130/115	1	/
HB17050LA ₂ B-7P		200/240	50/60	0.16/0.16	26/25	1900/1500	35/30	130/115	1	/

■ 外观尺寸 (mm)
Dimensions (mm)

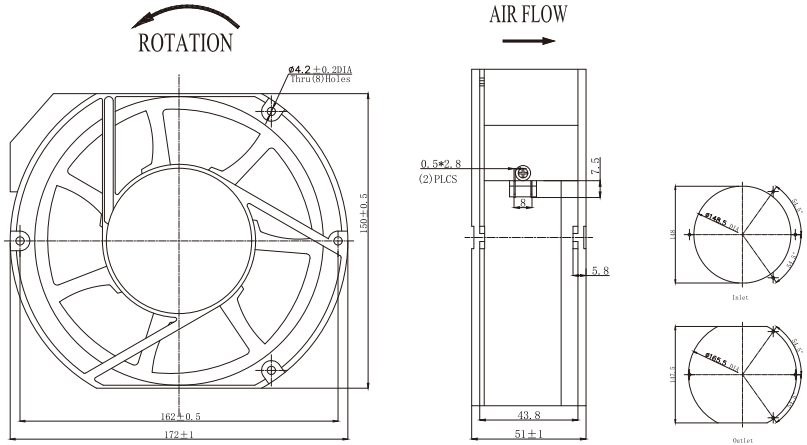

■ P-Q曲线
P-Q Curve

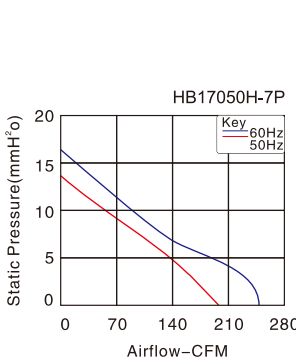

*For any customized design requirements regarding the above products, please contact KEXU sales


17251 AC FAN

尺寸 Size	Ø172mmx51mm
风量 Airflow	105-235CFM
重量 Weight	840g
噪音 Noise	30-50dB(A)
风叶 Impeller Material	PBT UL94-V0
外框 Frame	Aluminum Alloy
端子 Terminals	0.5mm
引线 Lead Wire	AWG#22 UL1569(Optional)
马达 Motor	Shaded Pole Induction Motor
温度范围 Operating Temperature	-10°C~+65°C




产品型号 Model	轴承形式 Bearing System	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	噪音 Noise	风量 Air Flow	相数 Phase	电容 Capacitor
		VAC	Hz	A	W	RPM	dB(A)	CFM		µF/VAC
HB17251HA ₁ S	Sleeve	100/125	50/60	0.50/0.45	37/36	2700/3100	45/50	190/235	1	/
HB17251HA ₂ S		200/240	50/60	0.22/0.21	34/33	2700/3100	45/50	190/235	1	/
HB17251HA ₁ B	Ball	100/125	50/60	0.50/0.45	37/36	2700/3100	45/50	190/235	1	/
HB17251HA ₂ B		200/240	50/60	0.22/0.21	34/33	2700/3100	45/50	190/235	1	/
HB17251MA ₁ S	Sleeve	100/125	50/60	0.41/0.39	32/30	2400/2300	41/40	170/160	1	/
HB17251MA ₂ S		200/240	50/60	0.19/0.18	30/28	2400/2300	41/40	170/160	1	/
HB17251MA ₁ B	Ball	100/125	50/60	0.41/0.39	32/30	2400/2300	41/40	170/160	1	/
HB17251MA ₂ B		200/240	50/60	0.19/0.18	30/28	2400/2300	41/40	170/160	1	/
HB17251LA ₁ S	Sleeve	100/125	50/60	0.35/0.35	26/25	1900/1500	32/30	125/105	1	/
HB17251LA ₂ S		200/240	50/60	0.16/0.16	26/25	1900/1500	32/30	125/105	1	/
HB17251LA ₁ B	Ball	100/125	50/60	0.35/0.35	26/25	1900/1500	32/30	125/105	1	/
HB17251LA ₂ B		200/240	50/60	0.16/0.16	26/25	1900/1500	32/30	125/105	1	/

■ 外观尺寸 (mm)
Dimensions (mm)

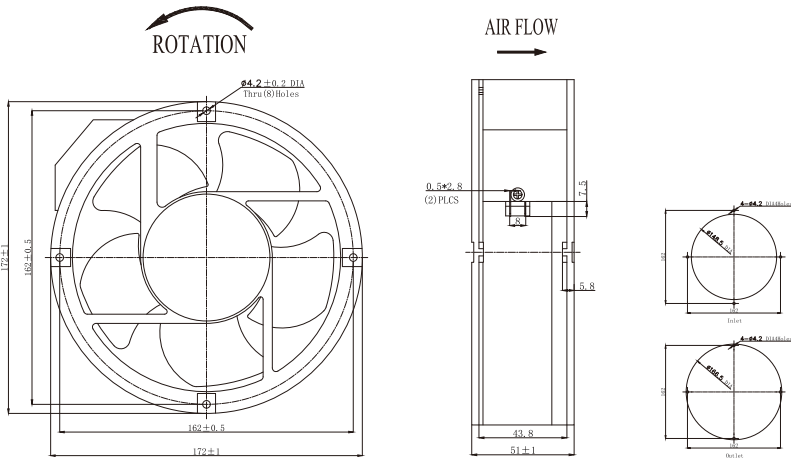

■ P-Q曲线
P-Q Curve



*For any customized design requirements regarding the above products, please contact KEXU sales


17050-C AC FAN

尺寸 Size	172mmx150mmx51mm
风量 Airflow	215-225CFM
重量 Weight	880g
噪音 Noise	51-58dB(A)
风叶 Impeller Material	PBT UL94-V0
外框 Frame	Aluminum Alloy
端子 Terminals	0.5mm
引线 Lead Wire	AWG#22 UL1569(Optional)
马达 Motor	Shaded Pole Induction Motor
温度范围 Operating Temperature	-10°C~+65°C




产品型号 Model	轴承形式 Bearing System	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	噪音 Noise	风量 Air Flow	相数 Phase	电容 Capacitor
		VAC	Hz	A	W	RPM	dB(A)	CFM		µF/VAC
HB17050HA1B-C	Ball	100/125	50/60	0.38/0.32	35/34	2850/3350	51/58	215/225	1	3.3/250
HB17050HA2B-C	Ball	200/240	50/60	0.11/0.11	25/27	2850/3350	51/58	215/225	1	0.75/500

■ 外观尺寸 (mm)
Dimensions (mm)

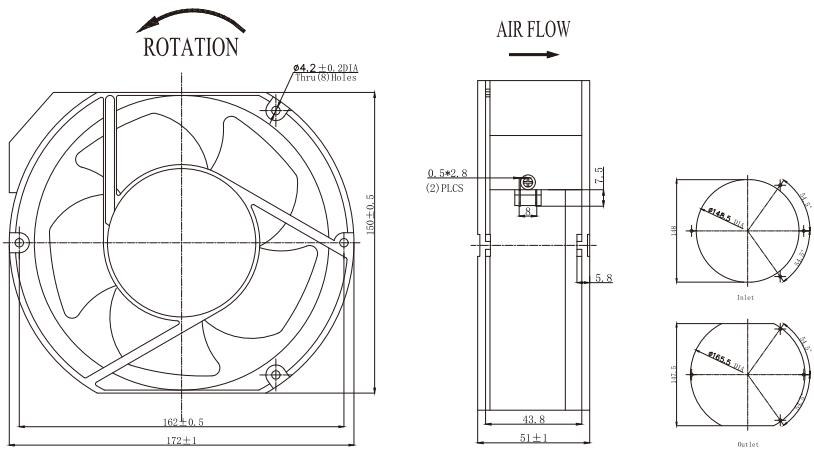

■ P-Q曲线
P-Q Curve



*For any customized design requirements regarding the above products, please contact KEXU sales


16060 AC FAN

尺寸 Size	160mmx160mmx60mm
风量 Airflow	194-223CFM
重量 Weight	1250g
噪音 Noise	65-68dB(A)
风叶 Impeller Material	Polypropylene
外框 Frame	Aluminum Alloy
端子 Terminals	0.5mm
引线 Lead Wire	AWG#22 UL1332(Optional)
马达 Motor	Capacitor-Run Induction Motor
温度范围 Operating Temperature	-10°C~+65°C




产品型号 Model	轴承形式 Bearing System	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	噪音 Noise	风量 Air Flow	相数 Phase	电容 Capacitor
		VAC	Hz	A	W	RPM	dB(A)	CFM		μF/VAC
HB16060HA ₁ -C	Ball	100/125	50/60	0.32	30	2750/3150	65/68	194/223	1	3/500
HB16060HA ₂ -C	Ball	200/240	50/60	0.13/0.1	25/24	2750/3150	65/68	194/223	1	1/500
HB16060HA ₃	Ball	380/420	50/60	0.10	25	2750/3150	65/68	194/223	3	/
HB16060HA ₆ -C	Ball	380/420	50/60	0.10	23/25	2750/3150	65/68	194/223	1	0.47/500

■ 外观尺寸 (mm)
Dimensions (mm)

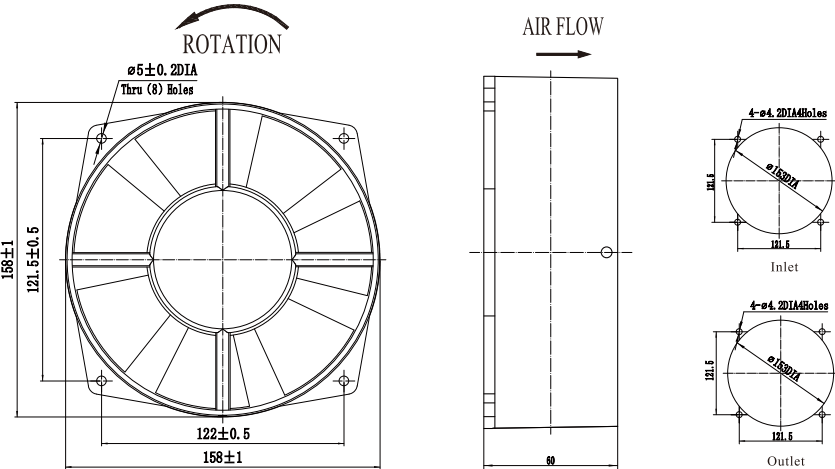

■ P-Q曲线
P-Q Curve



*For any customized design requirements regarding the above products, please contact KEXU sales


16062 AC FAN

尺寸 Size	160mmx160mmx62mm
风量 Airflow	220-275CFM
重量 Weight	1200g
噪音 Noise	50-59dB(A)
风叶 Impeller Material	PBT UL94-V0
外框 Frame	Aluminum Alloy
端子 Terminals	0.5mm
引线 Lead Wire	AWG#22 UL1569(Optional)
马达 Motor	Capacitor-Run Induction Motor
温度范围 Operating Temperature	-10°C~+65°C




产品型号 Model	轴承形式 Bearing System	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	噪音 Noise	风量 Air Flow	相数 Phase	电容 Capacitor
		VAC	Hz	A	W	RPM	dB(A)	CFM		μF/VAC
HB16062HA ₁ B-C-7P	Ball	100/125	50/60	0.38/0.37	37/39	2750/3050	54/59	240/275	1	3.3/250
HB16062HA ₃ B-C-7P		200/240	50/60	0.15/0.17	30/36	2750/3050	54/59	240/275	1	1/500
HB16062HA ₆ B-C-7P	Ball	380/420	50/60	0.08/0.09	30/35	2300/2600	50/54	220/225	3	/
HB16062HA ₃ B-C-7P		380/420	50/60	0.1	30/35	2300/2600	50/54	220/225	1	0.33/500
HB16062HA ₁ B-C-7P	Ball	100/125	50/60	0.35	35	2300/2600	50/54	220/225	1	3.3/250
HB16062HA ₃ B-C-7P		200/240	50/60	0.18	35	2300/2600	50/54	220/225	1	1/500

■ 外观尺寸 (mm)
Dimensions (mm)

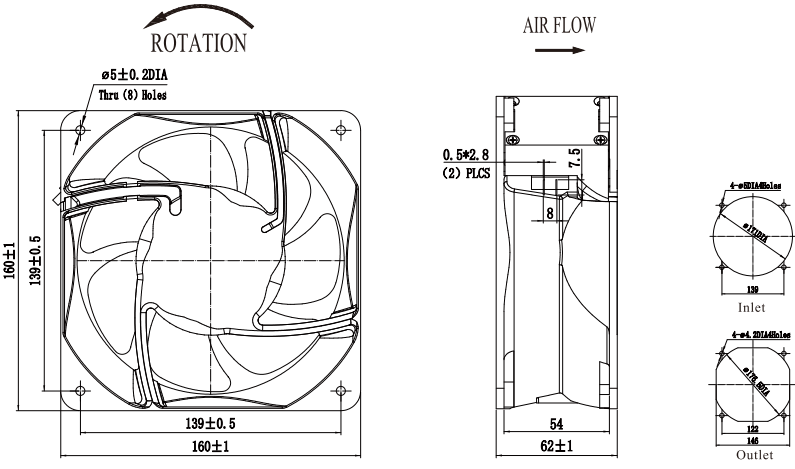

■ P-Q曲线
P-Q Curve



*For any customized design requirements regarding the above products, please contact KEXU sales


18065 AC FAN

尺寸 Size	180mmx180mmx65mm
风量 Airflow	355-385CFM
重量 Weight	1190g
噪音 Noise	60-62dB(A)
风叶 Impeller Material	Polypropylene
外框 Frame	Aluminum Alloy
端子 Terminals	0.5mm
引线 Lead Wire	AWG#24 UL1332(Optional)
马达 Motor	Capacitor-Run Induction Motor
温度范围 Operating Temperature	-10℃~+65℃




产品型号 Model	轴承形式 Bearing System	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	噪音 Noise	风量 Air Flow	相数 Phase	电容 Capacitor
		VAC	Hz	A	W	RPM	dB(A)	CFM		μF/VAC
HB18065HA ₁ B-C	Ball	100/125	50/60	0.42/0.55	46/59	2700/3000	60/62	355/385	1	3.3/250
HB18065HA ₂ B-C	Ball	200/240	50/60	0.19/0.24	40/50	2700/3000	60/62	355/385	1	1.5/500
HB18065HA ₃ B-C	Ball	380/420	50	0.15	40/50	2700	60	355	3	/

■ 外观尺寸 (mm)
Dimensions (mm)

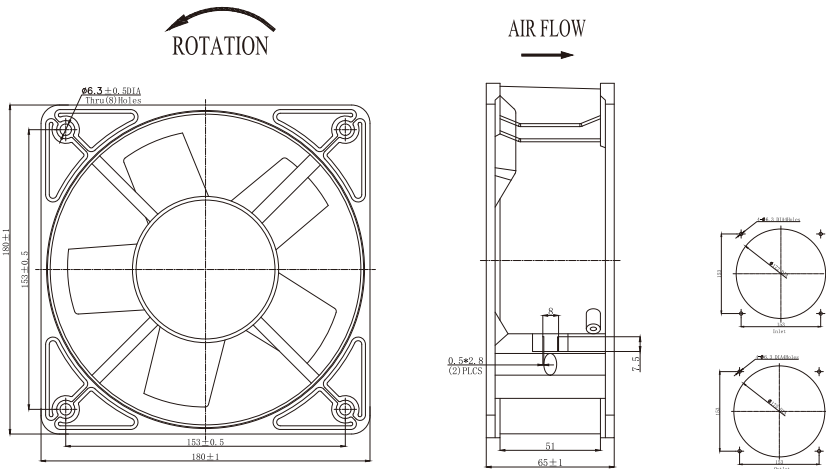

■ P-Q曲线
P-Q Curve



*For any customized design requirements regarding the above products, please contact KEXU sales


20060 AC FAN

尺寸 Size	200mmx200mmx60mm
风量 Airflow	350-530CFM
重量 Weight	1480g
噪音 Noise	54-65dB(A)
风叶 Impeller Material	PBT UL94-V0
外框 Frame	Aluminum Alloy
端子 Terminals	0.5mm
引线 Lead Wire	AWG#24 UL1332(Optional)
马达 Motor	Capacitor-Run Induction Motor
温度范围 Operating Temperature	-10℃~+65℃




产品型号 Model	轴承形式 Bearing System	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	噪音 Noise	风量 Air Flow	相数 Phase	电容 Capacitor
		VAC	Hz	A	W	RPM	dB(A)	CFM		μF/VAC
HB20060HA ₁ B-W-C	Ball	100/125	50/60	0.5/0.6	51/63	2600/2450	58/54	485/430	1	3.3/250
HB20060HA ₂ B-W-C	Ball	200/240	50/60	0.28/0.34	54/72	2600/2450	60/65	485/430	1	1/500
HB20060HA ₃ B-W	Ball	380/420	50/60	0.15/0.17	52/62	2600/2450	60/65	485/430	3	/
HB20060HA ₄ B-W-C	Ball	380/420	50/60	0.2	60	2600/2450	60/65	460/530	1	1/500
HB20060HA ₁ B-W-C	Ball	100/125	50/60	0.6	60	2100/2500	60/65	350/400	3	3.3/250
HB20060HA ₂ B-W-C	Ball	200/240	50/60	0.25	42	2100/2500	60/65	350/400	1	1/500

■ 外观尺寸 (mm)
Dimensions (mm)

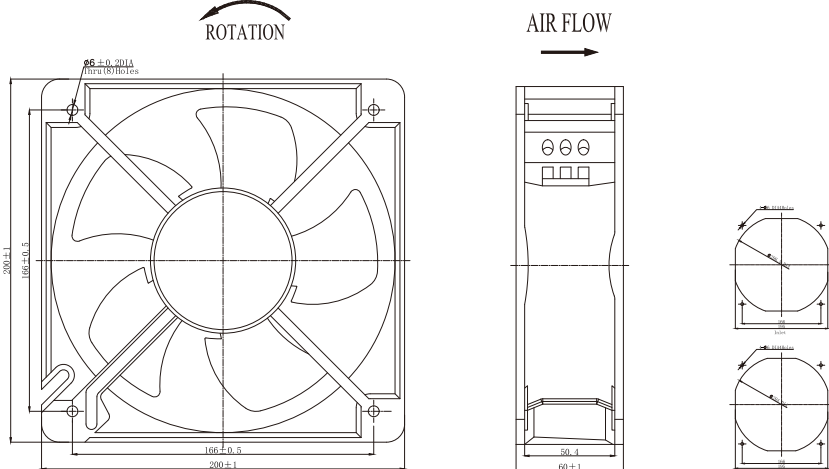

■ P-Q曲线
P-Q Curve



*For any customized design requirements regarding the above products, please contact KEXU sales


21070 AC FAN

尺寸 Size	210mmx210mmx70mm
风量 Airflow	419-468CFM
重量 Weight	1700g
噪音 Noise	70-75dB(A)
风叶 Impeller Material	Polypropylene
外框 Frame	Aluminum Alloy
端子 Terminals	0.5mm
引线 Lead Wire	AWG#24 UL1332(Optional)
马达 Motor	Capacitor-Run Induction Motor
温度范围 Operating Temperature	-10℃~+65℃




产品型号 Model	轴承形式 Bearing System	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	噪音 Noise	风量 Air Flow	相数 Phase	电容 Capacitor
		VAC	Hz	A	W	RPM	dB(A)	CFM		μF/VAC
HB21070HA ₁ B-C	Ball	100/125	50/60	0.35/0.43	45/52	2550/2950	70/75	419/468	1	3.3/250
HB21070HA ₂ -C	Ball	200/240	50/60	0.2/0.22	45/52	2550/2950	70/75	419/468	1	1/500
HB21070HA ₃	Ball	380/420	50/60	0.13/0.15	45/58	2550/2950	70/75	419/468	3	/
HB21070HA ₆ -C	Ball	380/420	50/60	0.11/0.13	45/58	2550/2950	70/75	419/468	1	1/500

■ 外观尺寸 (mm)
Dimensions (mm)

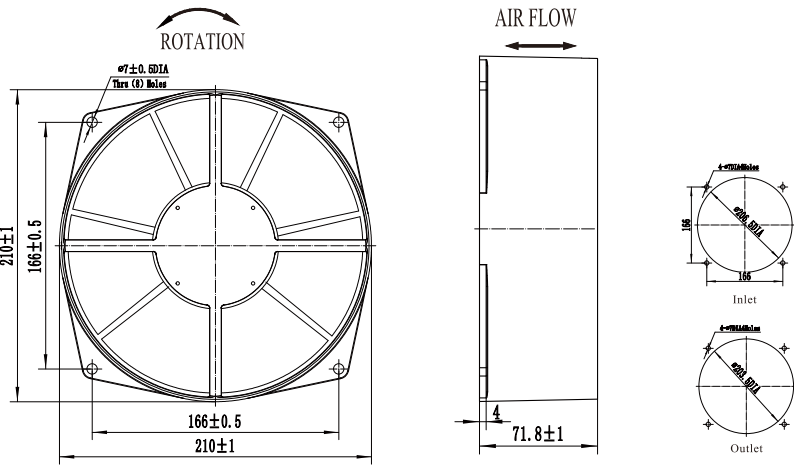

■ P-Q曲线
P-Q Curve



*For any customized design requirements regarding the above products, please contact KEXU sales


22060 AC FAN

尺寸 Size	Ø220mmx60mm
风量 Airflow	357-386CFM
重量 Weight	1600g
噪音 Noise	63-67dB(A)
风叶 Impeller Material	PBT UL94-V0
外框 Frame	Aluminum Alloy
端子 Terminals	Terminal block
引线 Lead Wire	AWG#22 UL1332(Optional)
马达 Motor	Shaded Pole Induction Motor
温度范围 Operating Temperature	-10℃~+65℃




产品型号 Model	轴承形式 Bearing System	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	噪音 Noise	风量 Air Flow	相数 Phase	电容 Capacitor
		VAC	Hz	A	W	RPM	dB(A)	CFM		μF/VAC
HB22060HA ₁ BL	Ball	200/240	50/60	0.4/0.37	56/53	2800/3150	63/67	357/386	1	/

■ 外观尺寸 (mm)
Dimensions (mm)

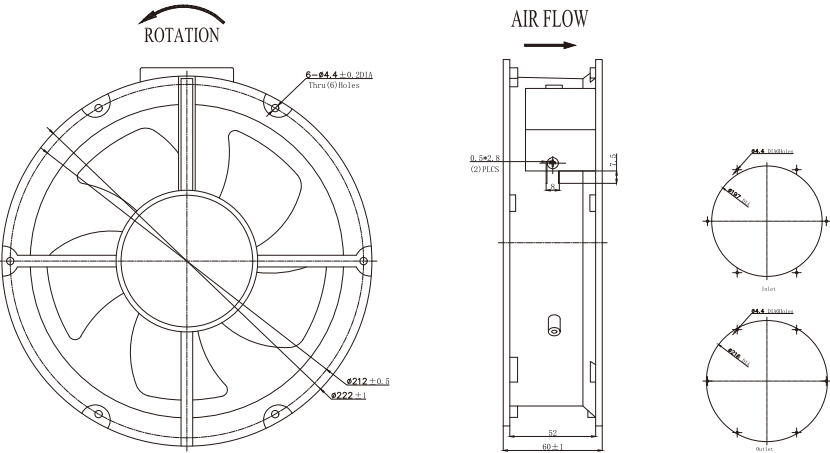

■ P-Q曲线
P-Q Curve



*For any customized design requirements regarding the above products, please contact KEXU sales


2509 AC FAN

尺寸 Size	Ø254mmx89mm
风量 Airflow	600-880CFM
重量 Weight	2208g
噪音 Noise	60-70dB(A)
风叶 Impeller Material	PBT UL94-V0
外框 Frame	Aluminum Alloy
端子 Terminals	0.5mm
引线 Lead Wire	AWG#22 UL1015(Optional)
马达 Motor	Capacitor-Run Induction Motor
温度范围 Operating Temperature	-10℃~+65℃




产品型号 Model	轴承形式 Bearing System	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	噪音 Noise	风量 Air Flow	电容 Capacitor
		VAC	Hz	A	W	RPM	dB(A)	CFM	μF/VAC
HB2509HA ₁ BL-C	Ball	100/125	50/60	0.7/0.85	95/100	2500/2850	68/70	810/880	8/250
HB2509HA ₂ BL-C	Ball	200/240	50/60	0.6/0.7	105/135	2500/2850	68/70	810/880	8/250
HB2509MA ₁ BL-C	Ball	100/125	50/60	0.6/0.65	75/85	2100/1900	62/60	665/600	8/250
HB2509MA ₂ BL-C	Ball	200/240	50/60	0.5/0.6	95/100	2100/1900	62/60	665/600	8/250

■ 外观尺寸 (mm)
Dimensions (mm)

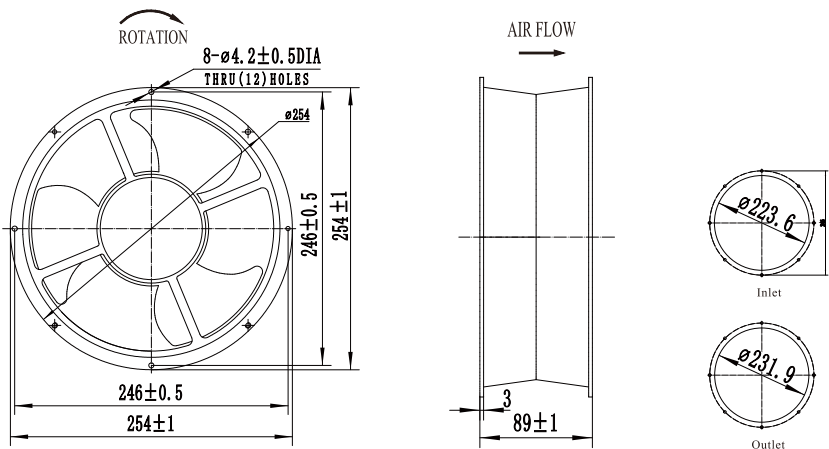

■ P-Q曲线
P-Q Curve

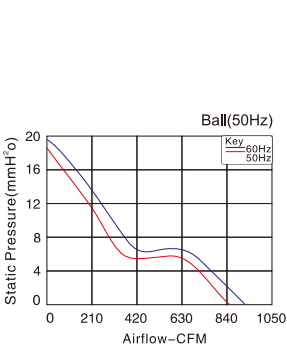

*For any customized design requirements regarding the above products, please contact KEXU sales


17055 AC FAN

尺寸 Size	172mmx150mmx55mm
风量 Airflow	191-224CFM
重量 Weight	1200g
噪音 Noise	48-52dB(A)
风叶 Impeller Material	Metal
外框 Frame	Aluminum Alloy
端子 Terminals	0.5mm
引线 Lead Wire	Teflon 22#UL 1332(Optional)
马达 Motor	Shaded Pole And External Rotor Induction Motor
温度范围 Operating Temperature	-10℃~+65℃




产品型号 Model	轴承形式 Bearing System	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	噪音 Noise	风量 Air Flow	相数 Phase	电容 Capacitor
		VAC	Hz	A	W	RPM	dB(A)	CFM		μF/VAC
HB17055HA ₁ B-7P	Ball	100/125	50/60	0.58/0.5	42/39	2800/3100	48/52	191/224	1	/
HB17055HA ₂ B-7P	Ball	200/240	50/60	0.25/0.2	35/31	2800/3100	48/52	191/224	1	/

■ 外观尺寸 (mm)
Dimensions (mm)

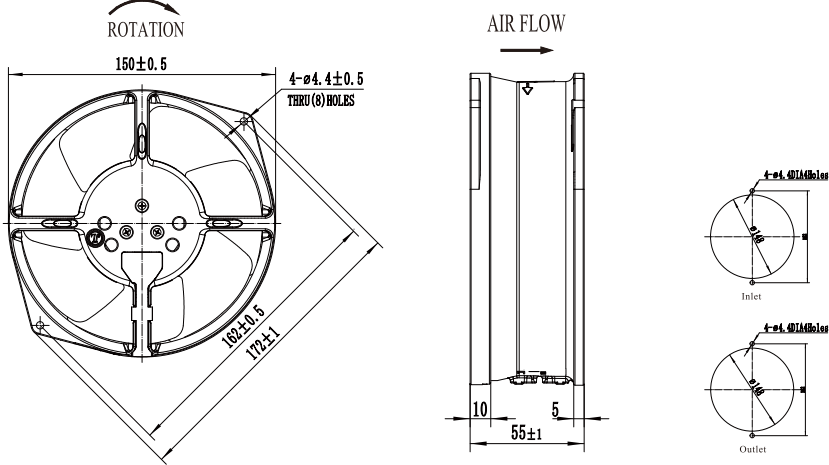

■ P-Q曲线
P-Q Curve



*For any customized design requirements regarding the above products, please contact KEXU sales


20572 AC FAN

尺寸 Size	205mmx205mmx72mm
风量 Airflow	610-725CFM
重量 Weight	2100g
噪音 Noise	61-71dB(A)
风叶 Impeller Material	Metal
外框 Frame	Aluminum Alloy
端子 Terminals	0.5mm
引线 Lead Wire	AWG#24 UL1332(Optional)
马达 Motor	Capacitor-Run Induction Motor
温度范围 Operating Temperature	-10℃~+65℃




产品型号 Model	轴承形式 Bearing System	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	噪音 Noise	风量 Air Flow	相数 Phase	电容 Capacitor
		VAC	Hz	A	W	RPM	dB(A)	CFM		μF/VAC
HB20572HA ₁ B-C	Ball	100/125	50/60	0.62/0.88	70/100	2800/3200	67/71	610/725	1	8/250
HB20572HA ₂ B-C	Ball	200/240	50/60	0.35/0.5	70/100	2800/3200	67/71	610/725	1	3/500
HB20572HA ₃ B-C	Ball	380/420	50/60	0.18/0.26	68/98	2800/3200	67/71	610/725	1	/
HB20572HA ₆ B-C	Ball	380/420	50/60	0.18/0.26	68/98	2800/3200	67/71	610/725	1	1/500

■ 外观尺寸 (mm)
Dimensions (mm)

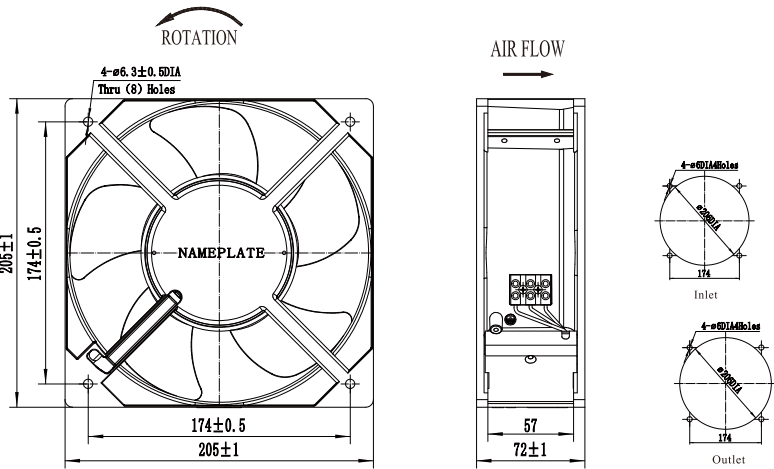

■ P-Q曲线
P-Q Curve

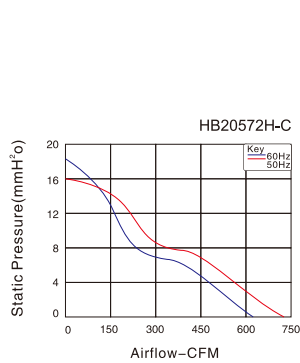

*For any customized design requirements regarding the above products, please contact KEXU sales


22580 AC FAN

尺寸 Size	225mmx225mmx80mm
风量 Airflow	597-661CFM
重量 Weight	2112g
噪音 Noise	59-61dB(A)
风叶 Impeller Material	Metal
外框 Frame	Aluminum Alloy
端子 Terminals	0.5mm
引线 Lead Wire	Teflon 22#UL 1332(Optional)
马达 Motor	Capacitor-Run And External Rotor Induction Motor
温度范围 Operating Temperature	-10℃~+65℃




产品型号 Model	轴承形式 Bearing System	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	噪音 Noise	风量 Air Flow	相数 Phase	电容 Capacitor
		VAC	Hz	A	W	RPM	dB(A)	CFM		μF/VAC
HB22580HA ₁ B-C-7P	Ball	100/125	50/60	0.68/0.65	60/72	2700/3100	59/61	597/661	1	4/250
HB22580HA ₂ B-C-7P	Ball	200/240	50/60	0.25/0.33	54/71	2700/3100	59/61	597/661	1	2.2/500
HB22580HA ₃ B-7P	Ball	380/420	50/60	0.25	50	2700/3100	59/61	597/661	3	/
HB22580HA ₆ B-C-7P	Ball	380/420	50/60	0.23/0.2	68/76	2700/3100	59/61	597/661	1	1/500

■ 外观尺寸 (mm)
Dimensions (mm)

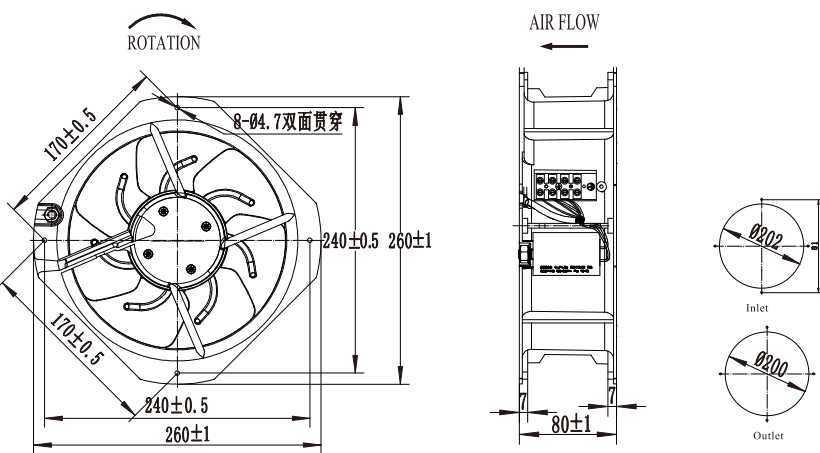

■ P-Q曲线
P-Q Curve

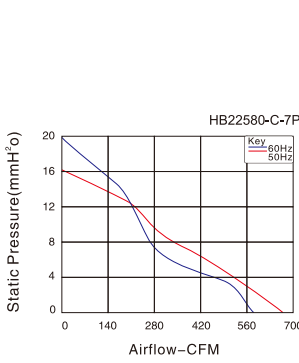

*For any customized design requirements regarding the above products, please contact KEXU sales

25489-7P AC FAN

尺寸 Size

风量 Airflow

重量 Weight

噪音 Noise

风叶 Impeller Material

外框 Frame

端子 Terminals

引线 Lead Wire

马达 Motor

温度范围 Operating Temperature

Ø254mmx89mm

955-993CFM

2600g

68-70dB(A)

Metal

Aluminum Alloy

0.5mm

Teflon 22#UL 1332(Optional)


Capacitor-Run And External Rotor Induction Motor

-10°C~+65°C




产品型号 Model	轴承形式 Bearing System	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	噪音 Noise	风量 Air Flow	相数 Phase	电容 Capacitor
		VAC	Hz	A	W	RPM	dB(A)	CFM		µF/VAC
HB25489HA ₁ B-C-7P	Ball	100/125	50/60	0.98/1.15	67177	2500/2650	68/70	955/993	1	4/250
HB25489HA ₂ B-C-7P	Ball	200/240	50/60	0.56/0.74	124/161	2500/2650	68/70	955/993	1	2.2/500
HB25489HA ₃ B-7P	Ball	380/420	50/60	0.3/0.4	108/132	2500/2650	68/70	955/993	3	/
HB25489HA ₆ B-C-7P	Ball	380/420	50/60	0.28/0.34	108/132	2500/2650	68/70	955/993	1	1/500

■ 外观尺寸 (mm)
Dimensions (mm)

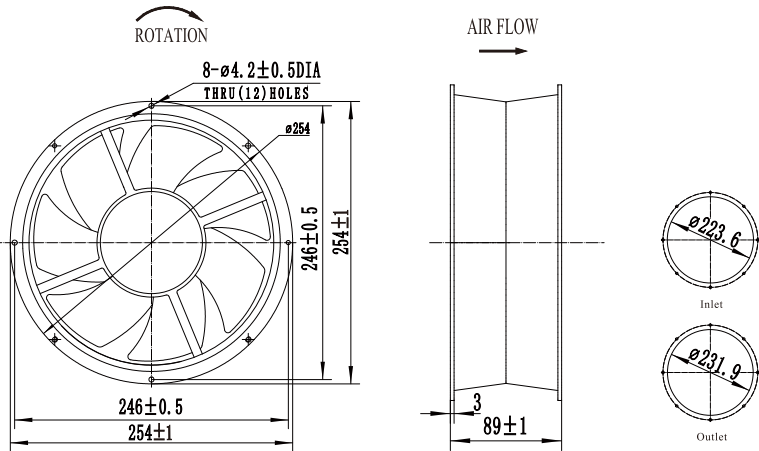

■ P-Q曲线
P-Q Curve

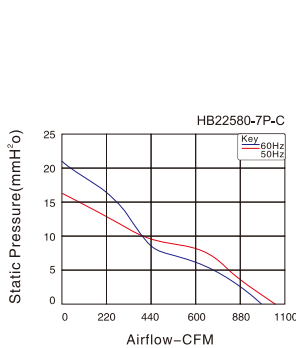

*For any customized design requirements regarding the above products, please contact KEXU sales

28080 AC FAN

尺寸 Size

风量 Airflow

重量 Weight

噪音 Noise

风叶 Impeller Material

外框 Frame

端子 Terminals

引线 Lead Wire

马达 Motor

温度范围 Operating Temperature

280mmx280mmx80mm

1098-1160CFM

2803g

69-70dB(A)

Metal

Aluminum Alloy

0.5mm

Teflon 22#UL1332(Optional)


Capacitor-Run And External Rotor Induction Motor

-10°C~+65°C




产品型号 Model	轴承形式 Bearing System	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	噪音 Noise	风量 Air Flow	相数 Phase	电容 Capacitor
		VAC	Hz	A	W	RPM	dB(A)	CFM		µF/VAC
HB28080HA ₁ B-C	Ball	100/125	50/60	1.2/1.3	126/148	2500/2800	69/70	1098/1160	1	2.8/250
HB28080HA ₂ B-C	Ball	200/240	50/60	0.58/0.63	126/148	2500/2800	69/70	1098/1160	1	4/500
HB28080HA ₃ B	Ball	380/420	50/60	0.75/0.9	126/148	2500/2800	69/70	1098/1160	3	/
HB28080HA ₆ B-C	Ball	380/420	50/60	0.24/0.25	126/148	2500/2800	69/70	1098/1160	1	2/500

■ 外观尺寸 (mm)
Dimensions (mm)

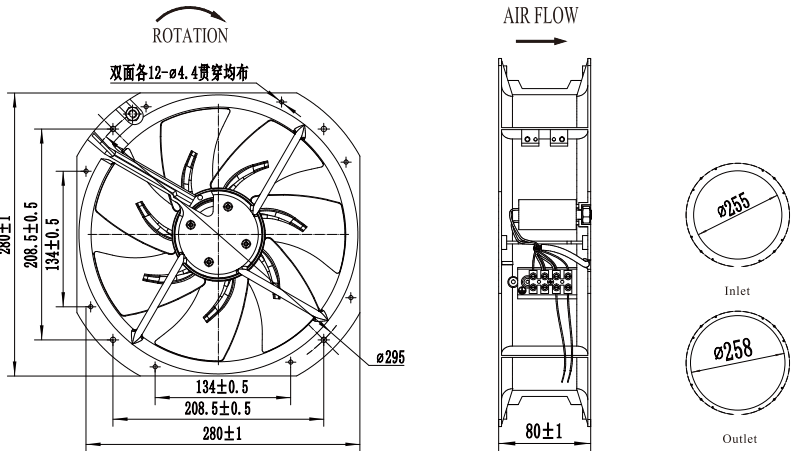

■ P-Q曲线
P-Q Curve

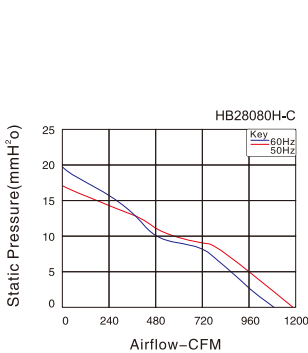

*For any customized design requirements regarding the above products, please contact KEXU sales

250-7P EXTERNAL ROTOR

风轮材质 MaterialCold rolled steel

防护等级 ProtectionIP44

认证 ApprovalsCCC CE

绝缘等级 Insulation classF



产品型号 Model	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	电容 Capacitor	风量 Air Flow	噪音 Noise	温度 Temperature	曲线 Curve No.	认证 approvals
	VAC	Hz	A	W	RPM	μF	m³/CFM	dB(A)	Min/Max(°C)	#	
YWF2E-250S-7	220/230	50	0.45	100	2480	3	1350/900	65	-30/+60	①	CCC,CE
		60	0.59	130	2600		1500/1000	6		②	
YWF2D-250S-7	380/400	50	0.18	90	2450	/	1350/900	65	-30/+60	①	CCC,CE
		60	0.20	116	2550		1500/1000	67		②	
YWF4E-250S-7	220/230	50	0.25	50	1400	2	860/500	53	-30/+60	③	CCC,CE
		60	0.30	65	1650		1000/590	54		④	
YWF4D-250S-7	380/400	50	0.17	50	1400	/	860/500	53	-30/+60	⑤	CCC,CE
		60	0.18	60	1650		1000/590	54		⑥	

300-7P EXTERNAL ROTOR

风轮材质 MaterialCold rolled steel

防护等级 ProtectionIP44


认证 ApprovalsCCC CE

绝缘等级 Insulation classF




产品型号 Model	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	电容 Capacitor	风量 Air Flow	噪音 Noise	温度 Temperature	曲线 Curve No.	认证 approvals
	VAC	Hz	A	W	RPM	μF	m³/CFM	dB(A)	Min/Max(°C)	#	
YWF2E-300S-7	220/230	50	0.55	125	2400	4	1900/1100	58	-30/+60	①	CCC,CE
		60	0.70	155	2600		2050/1150	60		②	
YWF2D-300S-7	380/400	50	0.25	115	2500	/	1900/1100	58	-30/+60	①	CCC,CE
		60	0.26	150	2650		2050/1150	60		②	
YWF4E-300S-7	220/230	50	0.40	80	1350	3	1650/1000	54	-30/+60	③	CCC,CE
		60	0.51	115	1600		1750/1050	55		④	
YWF4D-300S-7	380/400	50	0.25	80	1380	/	1650/1000	54	-30/+60	⑤	CCC,CE
		60	0.26	120	1640		1750/1050	55		⑥	


■ 外观尺寸 (mm)
Dimensions (mm)

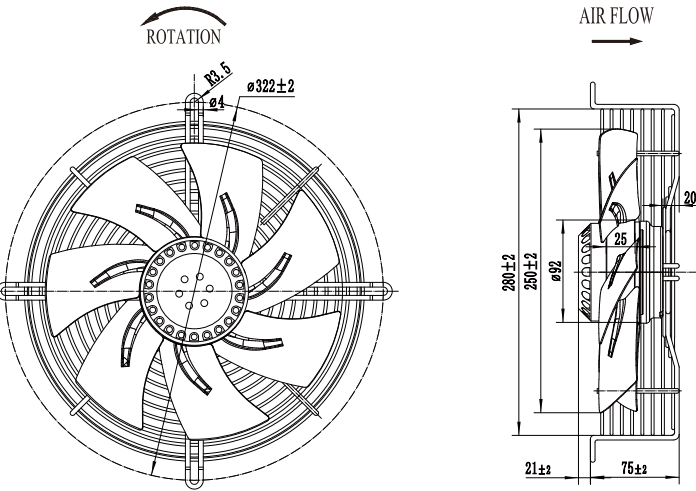


■ P-Q曲线
P-Q Curve



■ 外观尺寸 (mm)
Dimensions (mm)

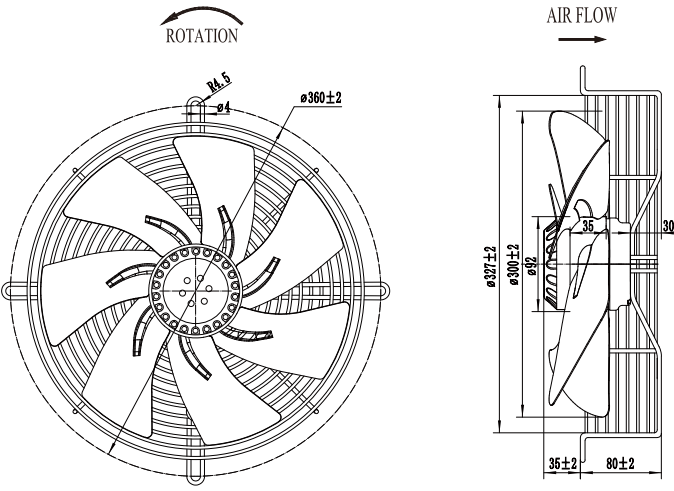

■ P-Q曲线
P-Q Curve



*For any customized design requirements regarding the above products, please contact KEXU sales

*For any customized design requirements regarding the above products, please contact KEXU sales


350-5P EXTERNAL ROTOR

风轮材质 Material Cold rolled steel
防护等级 Protection IP44
认证 Approvals CCC CE
绝缘等级 Insulation class F




产品型号 Model	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	电容 Capacitor	风量 Air Flow	噪音 Noise	温度 Temperature	曲线 Curve No.	认证 approvals
	VAC	Hz	A	W	RPM	μF	m³/CFM	dB(A)	Min/Max(°C)	#	
YWF4E-350S-5	220/230	50	0.60	135	1380	3	2700/1588	58	-30/+60	①	CCC,CE
		60	0.83	190	1550		3000/1765	60		②	
YWF4D-350S-5	380/400	50	0.38	135	1360	/	2700/1588	58	-30/+60	①	CCC,CE
		60	0.39	170	1500		3000/1765	60		②	
YWF6E-350S-5	220/230	50	0.40	80	950	3	1560/920	53	-30/+60	③	CCC,CE
		60	0.37	83	1100		1800/1060	54		④	
YWF6D-350S-5	380/400	50	0.22	70	920	/	1560/920	53	-30/+60	⑤	CCC,CE
		60	0.20	80	1050		1800/1060	54		⑥	

外观尺寸 (mm)
Dimensions (mm)

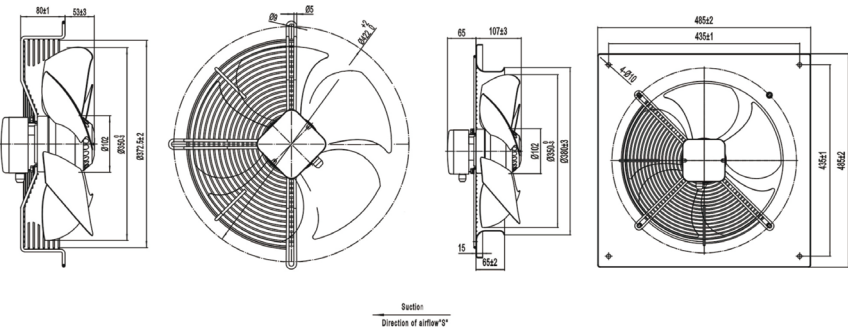


P-Q曲线
P-Q Curve

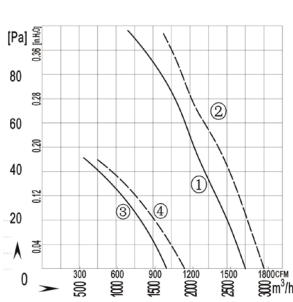

*For any customized design requirements regarding the above products, please contact KEXU sales


400-5P EXTERNAL ROTOR

风轮材质 Material Cold rolled steel
防护等级 Protection IP44
认证 Approvals CCC CE
绝缘等级 Insulation class F

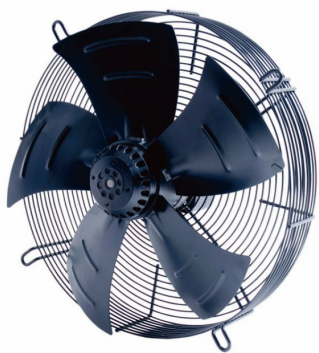


产品型号 Model	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	电容 Capacitor	风量 Air Flow	噪音 Noise	温度 Temperature	曲线 Curve No.	认证 approvals
	VAC	Hz	A	W	RPM	μF	m³/CFM	dB(A)	Min/Max(°C)	#	
YWF4E-400S-5	220/230	50	0.87	180	1350	6	3500/2000	60	-30/+60	①	CCC,CE
		60	1.22	260	1580		3900/2200	62		②	
YWF4D-400S-5	380/400	50	0.50	180	1370	/	3500/2000	60	-30/+60	①	CCC,CE
		60	0.47	145	1620		3900/2200	62		②	
YWF6E-400S-5	220/230	50	0.50	110	950	4	2600/1530	55	-30/+60	③	CCC,CE
		60	0.54	120	1100		3000/1765	57		④	
YWF6D-400S-5	380/400	50	0.31	110	950	/	2600/1530	55	-30/+60	⑤	CCC,CE
		60	0.30	135	1100		3000/1765	57		⑥	

外观尺寸 (mm)
Dimensions (mm)

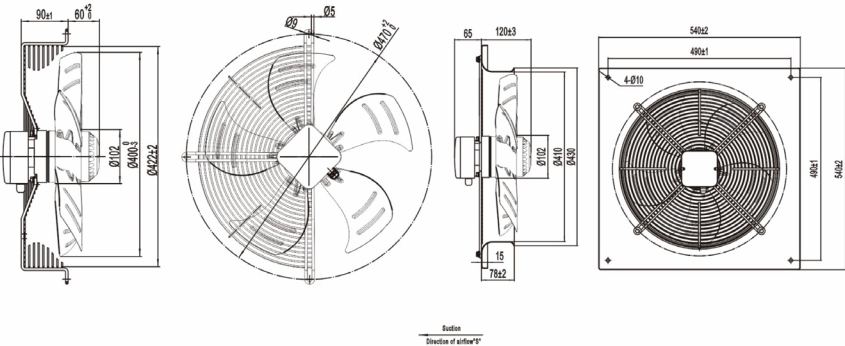

P-Q曲线
P-Q Curve

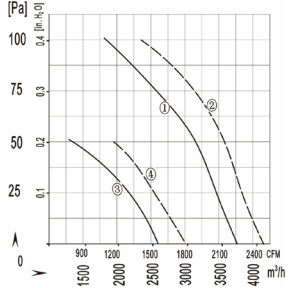

*For any customized design requirements regarding the above products, please contact KEXU sales


450-5P EXTERNAL ROTOR

风轮材质 MaterialCold rolled steel

防护等级 ProtectionIP44


认证 ApprovalsCCC CE

绝缘等级 Insulation classF

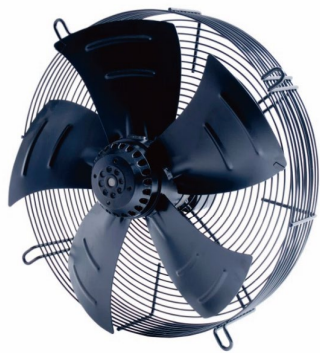


产品型号 Model	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	电容 Capacitor	风量 Air Flow	噪音 Noise	温度 Temperature	曲线 Curve No.	认证 approvals
	VAC	Hz	A	W	RPM	μF	m³/CFM	dB(A)	Min/Max(°C)	#	
YWF4E-450S-5	220/230	50	1.15	230	1350	7	4500/2650	62	-30/+60	①	CCC,CE
		60	1.20	280	1600		4800/2825	64		②	
YWF4D-450S-5	380/400	50	0.60	230	1350	/	4500/2650	62	-30/+60	①	CCC,CE
		60	0.80	280	1600		4800/2825	64		②	
YWF6E-450S-5	220/230	50	0.65	135	920	6	2900/1705	56	-30/+60	③	CCC,CE
		60	0.75	170	1100		3400/2000	58		④	
YWF6D-450S-5	380/400	50	0.31	135	910	/	2900/1705	56	-30/+60	③	CCC,CE
		60	0.34	140	1030		3400/2000	58		④	

■ 外观尺寸 (mm)
Dimensions (mm)

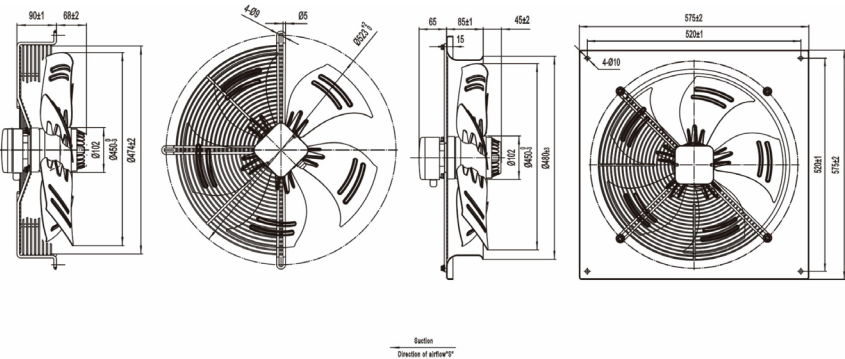

■ P-Q曲线
P-Q Curve

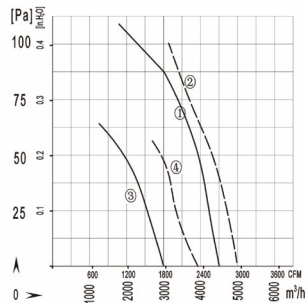

*For any customized design requirements regarding the above products, please contact KEXU sales

500-5P EXTERNAL ROTOR

风轮材质 MaterialCold rolled steel

防护等级 ProtectionIP44


认证 ApprovalsCCC CE

绝缘等级 Insulation classF




产品型号 Model	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	电容 Capacitor	风量 Air Flow	噪音 Noise	温度 Temperature	曲线 Curve No.	认证 approvals
	VAC	Hz	A	W	RPM	μF	m³/CFM	dB(A)	Min/Max(°C)	#	
YWF4E-500S-5	220/230	50	1.85	420	1320	10	6500/3835	69	-30/+60	①	CCC,CE
		60	2.30	500	1450		6800/4000	70		②	
YWF4D-500S-5	380/400	50	0.90	420	1350	/	6500/3835	69	-30/+60	①	CCC,CE
		60	1.00	500	1500		6800/4000	70		②	
YWF6E-500S-5	220/230	50	1.10	220	900	6	4320/2541	65	-30/+60	③	CCC,CE
		60	1.35	250	1020		4800/2823	66		④	
YWF6D-500S-5	380/400	50	0.60	220	900	/	4320/2541	65	-30/+60	③	CCC,CE
		60	0.65	250	1100		4800/2832	66		④	

■ 外观尺寸 (mm)
Dimensions (mm)

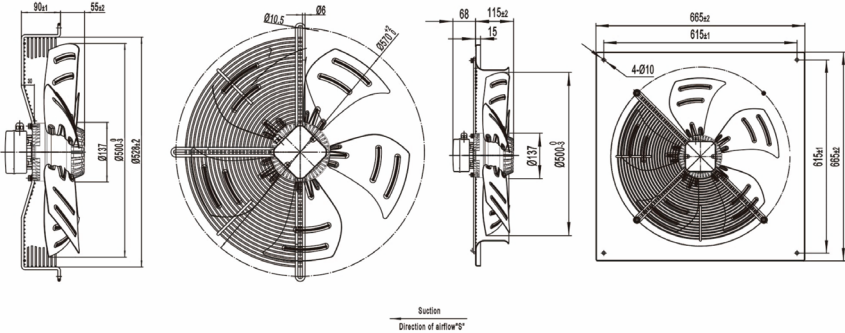

■ P-Q曲线
P-Q Curve



*For any customized design requirements regarding the above products, please contact KEXU sales


600-5P EXTERNAL ROTOR

风轮材质 MaterialCold rolled steel

防护等级 ProtectionIP44


认证 ApprovalsCCC CE

绝缘等级 Insulation classF

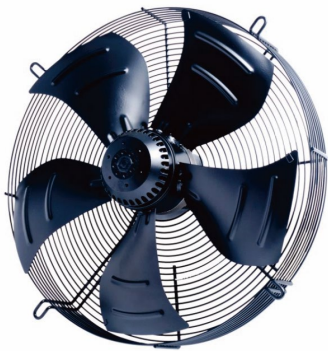


产品型号 Model	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	电容 Capacitor	风量 Air Flow	噪音 Noise	温度 Temperature	曲线 Curve No.	认证 approvals
	VAC	Hz	A	W	RPM	μF	m³/CFM	dB(A)	Min/Max(°C)	#	
YWF4E-600S-5	220/230	50	3.60	800	1380	16	9500/5700	73	-30/+60	①	CCC,CE
		60	4.20	920	1640		11000/6600	75		②	
YWF4D-600S-5	380/400	50	1.70	800	1350	/	9500/5700	73	-30/+60	①	CCC,CE
		60	2.00	1000	1550		11000/6600	75		②	
YWF6E-600S-5	220/230	50	2.40	500	910	12	8500/5100	69	-30/+60	③	CCC,CE
		60	2.94	640	1080		9700/5800	70		④	
YWF6D-600S-5	380/400	50	1.50	500	920	/	8500/5100	69	-30/+60	③	CCC,CE
		60	1.55	575	1070		9700/5800	70		④	

外观尺寸 (mm)
Dimensions (mm)

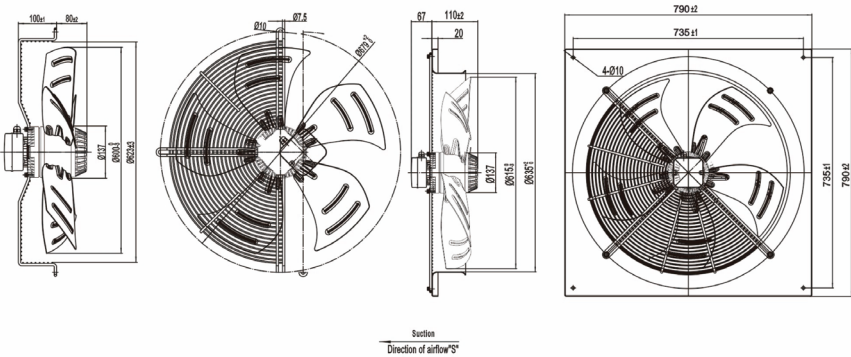

P-Q曲线
P-Q Curve

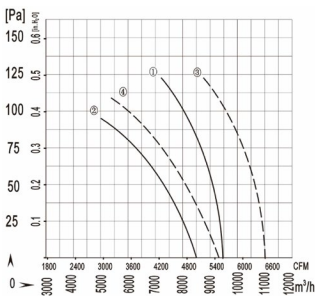

*For any customized design requirements regarding the above products, please contact KEXU sales

630-5P EXTERNAL ROTOR

风轮材质 MaterialCold rolled steel

防护等级 ProtectionIP44


认证 ApprovalsCCC CE

绝缘等级 Insulation classF




产品型号 Model	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	电容 Capacitor	风量 Air Flow	噪音 Noise	温度 Temperature	曲线 Curve No.	认证 approvals
	VAC	Hz	A	W	RPM	μF	m³/CFM	dB(A)	Min/Max(°C)	#	
YWF4E-630S-5	220/230	50	3.70	850	1360	16	10800/6500	74	-30/+60	①	CCC,CE
		60	5.34	1150	1500		11000/6600	75		②	
YWF4D-630S-5	380/400	50	1.80	850	1350	/	10800/6500	74	-30/+60	①	CCC,CE
		60	2.00	1010	1540		11000/6600	75		②	
YWF6E-630S-5	220/230	50	2.50	520	900	12	9300/5600	67	-30/+60	③	CCC,CE
		60	3.25	705	1050		10500/6300	71		④	
YWF6D-630S-5	380/400	50	1.40	550	900	/	9300/5600	67	-30/+60	③	CCC,CE
		60	1.56	740	1060		10500/6300	71		④	

外观尺寸 (mm)
Dimensions (mm)

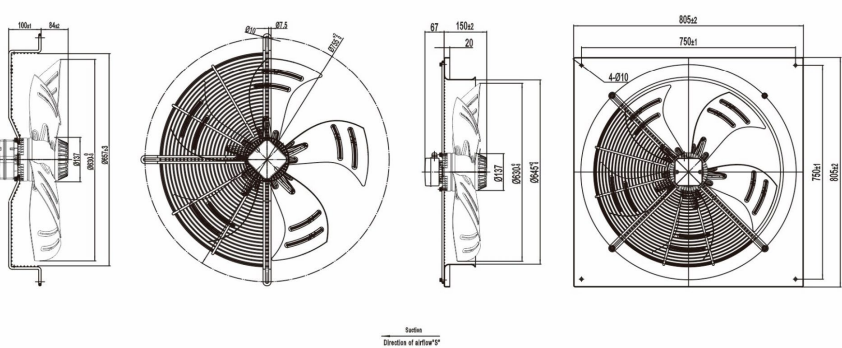

P-Q曲线
P-Q Curve

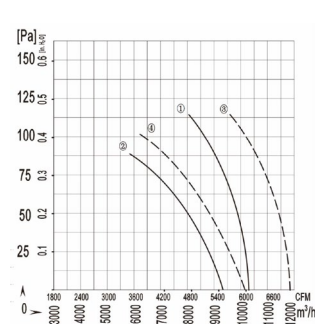

*For any customized design requirements regarding the above products, please contact KEXU sales

180-49 CENTRIFUGAL FAN

风轮材质 MaterialPlastic PA66

防护等级 ProtectionIP44

认证 ApprovalsCE

绝缘等级 Insulation classF



产品型号 Model	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	电容 Capacitor	风量 Air Flow	噪音 Noise	温度 Temperature	曲线 Curve No.	认证 approvals
	V	Hz	A	W	RPM	μF	m³/CFM	dB(A)	Min/Max(°C)	#	
YWFH2E-180-049	220/230	50	0.24	52	2550	1.5	430/253	63	-30/+60	①	CCC,CE
	220/230	60	0.32	66	2850	1.5	480/282	66	-30/+60	②	CCC,CE

190-63 CENTRIFUGAL FAN

风轮材质 MaterialPlastic PA66

防护等级 ProtectionIP44


认证 ApprovalsCE

绝缘等级 Insulation classF




产品型号 Model	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	电容 Capacitor	风量 Air Flow	噪音 Noise	温度 Temperature	曲线 Curve No.	认证 approvals
	V	Hz	A	W	RPM	μF	m³/CFM	dB(A)	Min/Max(°C)	#	
YWFH2E-190-063	220/230	50	0.27	60	2500	2.0	540/317	65	-30/+60	①	CCC,CE
	220/230	60	0.35	76	2700	2.0	600/350	68	-30/+60	②	CCC,CE


■ 外观尺寸 (mm)
Dimensions (mm)

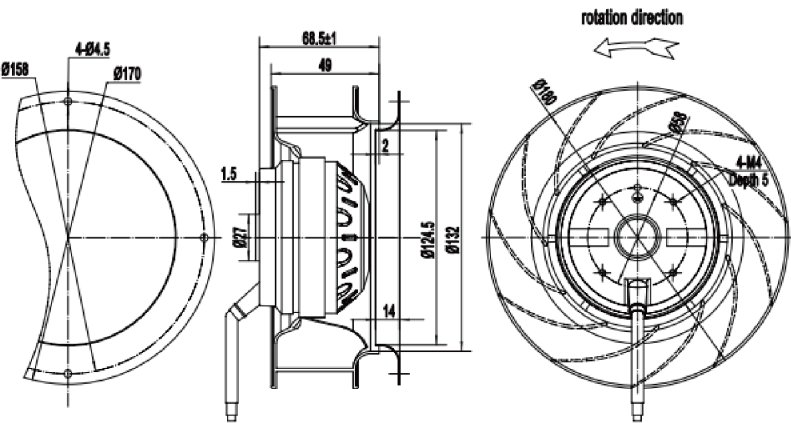


■ P-Q曲线
P-Q Curve

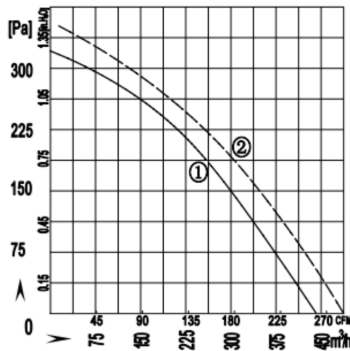

■ 外观尺寸 (mm)
Dimensions (mm)

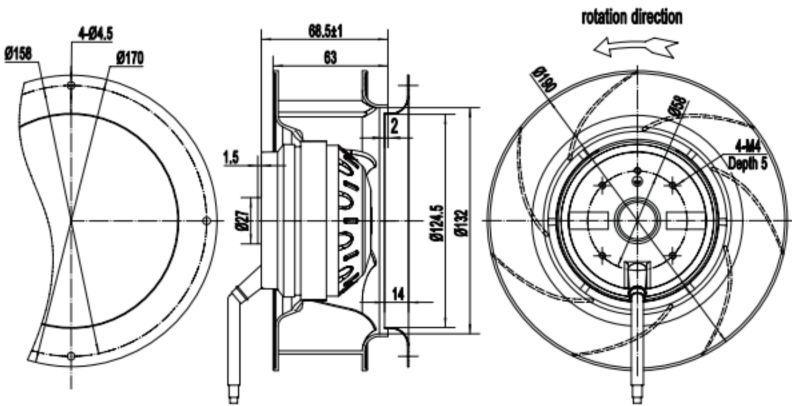

■ P-Q曲线
P-Q Curve

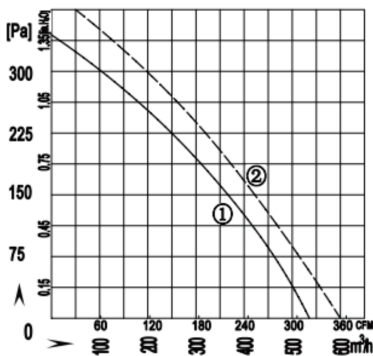

*For any customized design requirements regarding the above products, please contact KEXU sales

*For any customized design requirements regarding the above products, please contact KEXU sales

220-64 CENTRIFUGAL FAN

风轮材质 MaterialPlastic PA66

防护等级 ProtectionIP44


认证 ApprovalsCE

绝缘等级 Insulation classF




产品型号 Model	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	电容 Capacitor	风量 Air Flow	噪音 Noise	温度 Temperature	曲线 Curve No.	认证 approvals
	V	Hz	A	W	RPM	μF	m³/CFM	dB(A)	Min/Max(°C)	#	
YWFH2E-220-064	220/230	50	0.41	90	2500	2.5	910/535	70	-30/+60	①	CCC,CE
	220/230	60	0.46	100	2700	2.5	970/570	73	-30/+60	②	CCC,CE
YWFH2D-220-064	380/400	50	0.17	85	2500	/	910/535	70	-30/+60	①	CCC,CE
	380/400	60	0.20	100	2700	/	970/570	73	-30/+60	②	CCC,CE
YWFH4E-220-064	220/230	50	0.23	40	1420	1.5	550/323	52	-30/+60	①	CCC,CE
	220/230	60	0.19	41	1650	1.5	610/359	58	-30/+60	②	CCC,CE
YWFH4D-220-064	380/400	50	0.06	38	1400	/	550/323	52	-30/+60	①	CCC,CE
	380/400	60	0.10	41	1650	/	610/359	58	-30/+60	②	CCC,CE

■ 外观尺寸 (mm)
Dimensions (mm)

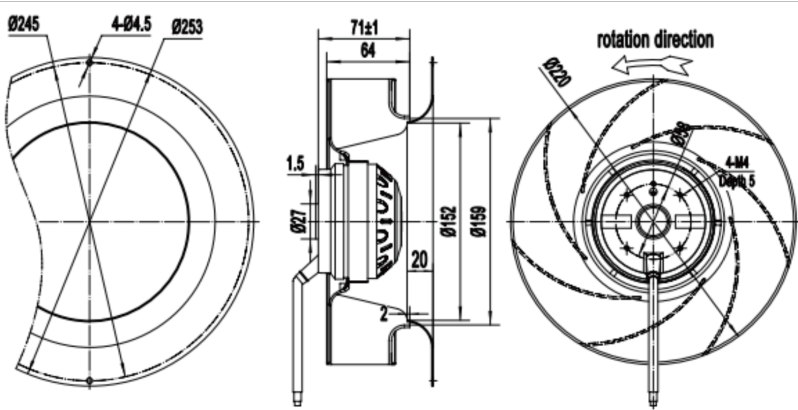

■ P-Q曲线
P-Q Curve

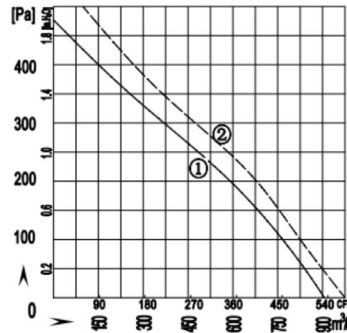

*For any customized design requirements regarding the above products, please contact KEXU sales

225-89 CENTRIFUGAL FAN

风轮材质 MaterialPlastic PA66

防护等级 ProtectionIP44


认证 ApprovalsCE

绝缘等级 Insulation classF




产品型号 Model	电压 Voltage	频率 Frequency	电流 Current	功率 Power	转速 Speed	电容 Capacitor	风量 Air Flow	噪音 Noise	温度 Temperature	曲线 Curve No.	认证 approvals
	V	Hz	A	W	RPM	μF	m³/CFM	dB(A)	Min/Max(°C)	#	
YWFH2E-225-089	220/230	50	0.60	135	2600	4	1100/647	70	-30/+60	①	CCC,CE
	220/230	60	0.90	180	2900	4	1250/735	72	-30/+60	②	CCC,CE
YWFH2D-225-089	380/400	50	0.23	135	2600	/	1100/647	70	-30/+60	①	CCC,CE
	380/400	60	0.28	180	2900	/	1250/735	72	-30/+60	②	CCC,CE
YWFH4E-225-089	220/230	50	0.21	45	1420	1.5	600/353	54	-30/+60	①	CCC,CE
	220/230	60	0.20	47	1650	1.5	690/406	60	-30/+60	②	CCC,CE
YWFH4D-225-089	380/400	50	0.13	45	1420	/	600/353	54	-30/+60	①	CCC,CE
	380/400	60	0.13	47	1650	/	690/406	60	-30/+60	②	CCC,CE

■ 外观尺寸 (mm)
Dimensions (mm)

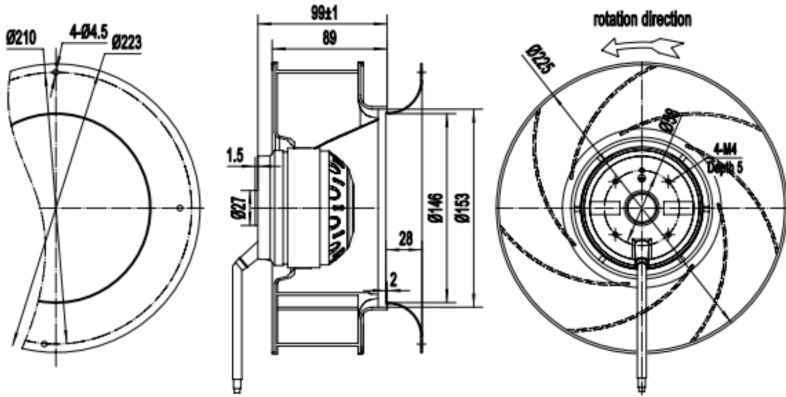

■ P-Q曲线
P-Q Curve

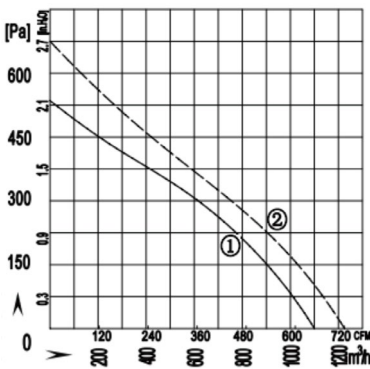

*For any customized design requirements regarding the above products, please contact KEXU sales


6025 DC FAN

轴承结构 Bearing system Ball or Sleeve
外框材质 Frame Thermoplastic PBT UL 94V-0
扇叶材质 Impeller Thermoplastic PBT UL 94V-0
风扇单重 Weight 61.2g(Weight:61.2g)




产品型号 Model	额定电压 Voltage	工作电压范围 Operating Voltage Range	额定电流 Rated Current	额定输入功率 Rated nput Pdwer	转速 Speed	最大风量 Maximum Air Flow		最大风压 Maximum Air Pressure		噪音 Noise
	VDC	VDC	Amp	Watt	RPM	m³/min	dB(A)	mm H2O	In H2O	dB(A)
HB6025X12X	12	7.0to13.5	0.14	1.68	3500	0.5	17.77	3.56	0.14	30.4
HB6025X24X	24	18to26.5	0.07	1.68						
HB6025X12X	12	7.0to13.5	0.17	2.04	4000	0.59	20.67	4.58	0.18	33.9
HB6025X24X	24	18to26.5	0.1	2.4						
HB6025X48X	48	36to54	0.05	2.4	4500	0.66	23.32	5.76	0.23	37.2
HB6025X12X	12	7.0to13.5	0.19	2.28						
HB6025X24X	24	18to26.5	0.11	2.64	5000	0.73	25.69	7.18	0.28	39.2
HB6025X48X	48	36to54	0.06	2.88						
HB6025X12X	12	7.0to13.5	0.23	2.76	5500	0.81	28.5	8.81	0.35	42
HB6025X24X	24	18to26.5	0.12	2.88						
HB6025X48X	48	36to54	0.07	3.36	6000	0.88	31.21	10.39	0.41	45.4
HB6025X12X	12	7.0to13.5	0.32	3.84						
HB6025X24X	24	18to26.5	0.16	3.84						
HB6025X48X	48	36to54	0.09	4.32						
HB6025X12X	12	7.0to13.5	0.42	5.04						
HB6025X24X	24	18to26.5	0.18	4.32						
HB6025X48X	48	36to54	0.1	4.8						

■ 外观尺寸 (mm)
Dimensions (mm)

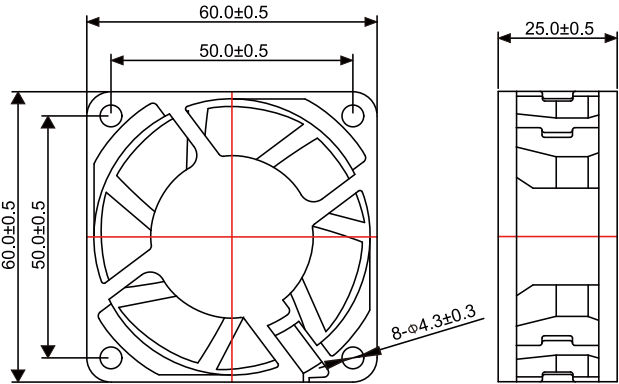

■ P-Q曲线
P-Q Curve

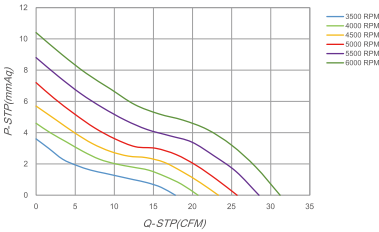

*For any customized design requirements regarding the above products, please contact KEXU sales


6038 DC FAN

轴承结构 Bearing system Ball or Sleeve
外框材质 Frame Thermoplastic PBT UL 94V-0
扇叶材质 Impeller Thermoplastic PBT UL 94V-0




产品型号 Model	额定电压 Voltage	工作电压范围 Operating Voltage Range	额定电流 Rated Current	额定输入功率 Rated nput Power	转速 Speed	最大风量 Maximum Air Flow		最大风压 Maximum Air Pressure		噪音 Noise
	VDC	VDC	Amp	Watt	RPM	m³/min	dB(A)	mm H2O	In H2O	dB(A)
HB6038X12X	12	8.0to13.5	0.1	1.2.	4000	0.59	20.83	5.86	0.23	37.4
HB6038X24X	24	18to26.5	0.06	0.44						
HB6038X12X	12	8.0to13.5	0.15	1.8	5000	0.71	25.06	8.1	0.32	39.6
HB6038X24X	24	18to26.5	0.07	1.68						
HB6038X48X	48	36to54	0.06	2.88	6000	0.86	30.3	11.87	0.47	44.9
HB6038X12X	12	8.0to13.5	0.21	2.52						
HB6038X24X	24	18to26.5	0.13	3.12	7000	1.00	35.18	15.9	0.63	48.8
HB6038X48X	48	36to54	0.09	4.32						
HB6038X12X	12	8.0to13.5	0.3	3.6	8000	1.17	41.34	21.65	0.85	52.3
HB6038X24X	24	18to26.5	0.2	4.8						
HB6038X48X	48	36to54	0.12	5.76	10000	1.49	52.5	33.7	1.33	57.6
HB6038X12X	12	8.0to13.5	0.58	6.96						
HB6038X24X	24	18to26.5	0.32	7.68	11000	1.64	58	40.61	1.60	59.8
HB6038X48X	48	36to54	0.23	11.04						
HB6038X12X	12	8.0to13.5	1.12	13.44	12000	1.80	63.56	48.53	1.91	62.5
HB6038X24X	24	18to26.5	0.57	13.68						
HB6038X48X	48	36to54	0.29	13.92						
HB6038X12X	12	8.0to13.5	1.5	18						
HB6038X24X	24	18to26.5	0.8	19.2						
HB6038X48X	48	36to54	0.41	19.68						

■ 外观尺寸 (mm)
Dimensions (mm)

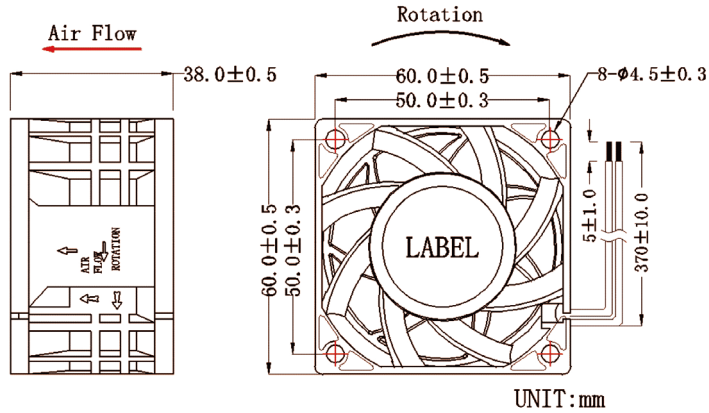

■ P-Q曲线
P-Q Curve

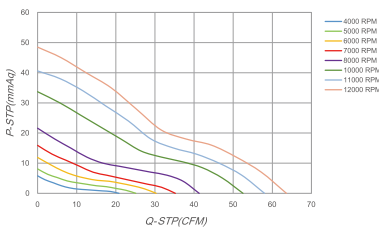

*For any customized design requirements regarding the above products, please contact KEXU sales


8025 DC FAN

轴承结构 Bearing system Ball or Sleeve
外框材质 Frame Thermoplastic PBT UL 94V-0
扇叶材质 Impeller Thermoplastic PBT UL 94V-0
风扇单重 Weight 72g(Weight:72g)




产品型号 Model	额定电压 Voltage	工作电压范围 Operating Voltage Range	额定电流 Rated Current	额定输入功率 Rated nput Pdwer	转速 Speed	最大风量 Maximum Air Flow		最大风压 Maximum Air Pressure		噪音 Noise
	VDC	VDC	Amp	Watt	RPM	m³/min	dB(A)	mm H2O	In H2O	dB(A)
HB8025X12X	12	7.0to13.5	0.14	1.68	2500	0.86	30.54	2.64	0.10	28.9
HB8025X24X	24	18to26.5	0.07	1.68						
HB8025X12X	12	7.0to13.5	0.2	2.4	3000	1.03	36.46	3.59	0.14	33.8
HB8025X24X	24	18to26.5	0.11	2.64						
HB8025X12X	12	7.0to13.5	0.26	3.12	3500	1.20	42.37	4.8	0.19	38.5
HB8025X24X	24	18to26.5	0.13	3.12						
HB8025X48X	48	36to54	0.06	2.88	4000	1.37	48.53	6.12	0.24	41
HB8025X12X	12	7.0to13.5	0.32	3.84						
HB8025X24X	24	18to26.5	0.16	3.84						
HB8025X48X	48	36to54	0.09	4.32	4500	1.55	54.67	7.64	0.30	44.3
HB8025X24X	24	18to26.5	0.23	5.52						
HB8025X48X	48	36to54	0.1	4.8						

外观尺寸 (mm)
Dimensions (mm)

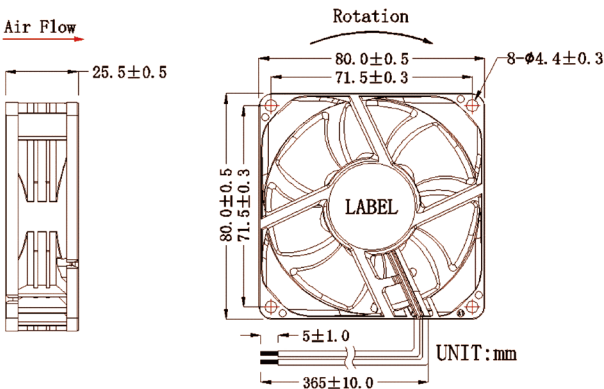

P-Q曲线
P-Q Curve

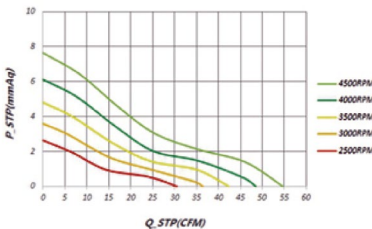

*For any customized design requirements regarding the above products, please contact KEXU sales


8038 DC FAN

轴承结构 Bearing system Ball or Sleeve
外框材质 Framer Thermoplastic PBT UL 94V-0
扇叶材质 Impeller Thermoplastic PBT UL 94V-0
风扇单重 Weight 177.6g(Weight:177.6g)




产品型号 Model	额定电压 Voltage	工作电压范围 Operating Voltage Range	额定电流 Rated Current	额定输入功率 Rated nput Pdwer	转速 Speed	最大风量 Maximum Air Flow		最大风压 Maximum Air Pressure		噪音 Noise
	VDC	VDC	Amp	Watt	RPM	m³/min	dB(A)	mm H2O	In H2O	dB(A)
HB8038X12X	12	8.0to13.5	0.4	4.8	4000	1.42	50.03	8.1	0.32	45.6
HB8038X24X	24	18to26.5	0.2	4.8						
HB8038X48X	48	36to54	0.1	4.8	5500	1.94	68.55	13.91	0.55	54.2
HB8038X12X	12	8.0to13.5	0.79	9.48						
HB8038X24X	24	18to26.5	0.34	8.16						
HB8038X48X	48	36to54	0.16	7.68	6000	2.12	75.01	16.53	0.65	56.2
HB8038X12X	12	8.0to13.5	0.92	11.04						
HB8038X24X	24	18to26.5	0.42	10.08						
HB8038X48X	48	36to54	0.2	9.6	7000	2.55	89.97	23.76	0.94	61
HB8038X12X	12	8.0to13.5	1.32	15.84						
HB8038X24X	24	18to26.5	0.68	16.32						
HB8038X48X	48	36to54	0.35	16.8	7500	2.76	97.41	27.59	1.09	63.5
HB8038X12X	12	8.0to13.5	1.62	19.44						
HB8038X24X	24	18to26.5	0.8	19.2						
HB8038X48X	48	36to54	0.45	21.6	8500	3.17	111.87	35.67	1.40	66.6
HB8038X12X	12	8.0to13.5	2.50	30.0						
HB8038X24X	24	18to26.5	1.35	30.0						
HB8038X48X	48	36to54	0.63	30.2						

外观尺寸 (mm)
Dimensions (mm)

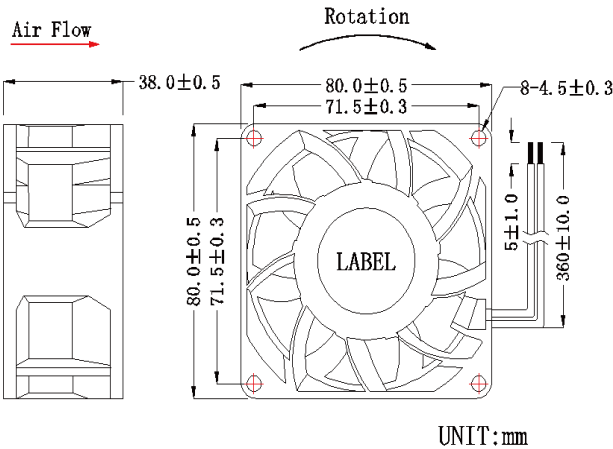

P-Q曲线
P-Q Curve

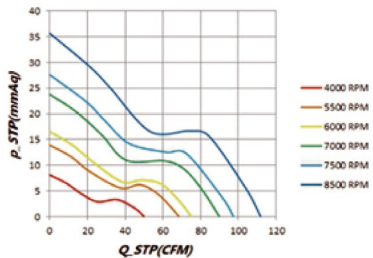

*For any customized design requirements regarding the above products, please contact KEXU sales


9225 DC FAN

轴承结构 Bearing systemBall or Sleeve
外框材质 FrameThermoplastic PBT UL 94V-0
扇叶材质 ImpellerThermoplastic PBT UL 94V-0
风扇单重 Weight117g(Weight:117g)



产品型号 Model	额定电压 Voltage	工作电压范围 Operating Voltage Range	额定电流 Rated Current	额定输入功率 Rated nput Pdwer	转速 Speed	最大风量 Maximum Air Flow		最大风压 Maximum Air Pressure		噪音 Noise
	VDC	VDC	Amp	Watt	RPM	m³/min	dB(A)	mm H2O	In H2O	dB(A)
HB9225X12X	12	7.0to13.5	0.4	4.8	4000	2.36	83.41	7.16	0.28	49
HB9225X24X	24	18to26.5	0.25	6						
HB9225X48X	48	36to54	0.13	6.24						
HB9225X12X	12	7.0to13.5	0.55	6.6	4500	2.63	92.99	8.79	0.35	53
HB9225X24X	24	18to26.5	0.32	7.68						
HB9225X48X	48	36to54	0.17	8.16						
HB9225X12X	12	7.0to13.5	1.05	12.6	5000	2.94	103.8	10.66	0.42	56.3
HB9225X24X	24	18to26.5	0.53	12.7						
HB9225X48X	48	36to54	0.26	12.48						

外观尺寸 (mm)
Dimensions (mm)

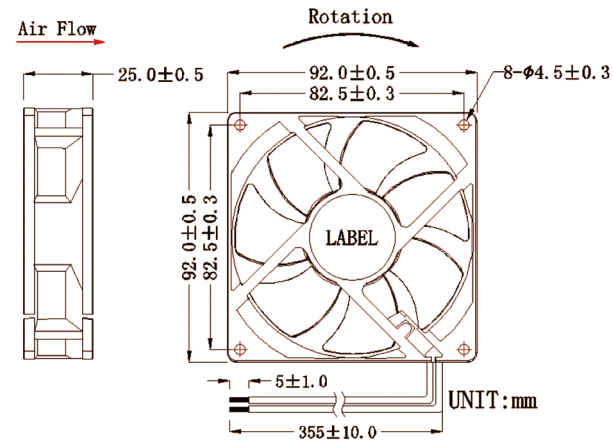

*For any customized design requirements regarding the above products, please contact KEXU sales


9238 DC FAN

轴承结构 Bearing systemBall or Sleeve
外框材质 FrameThermoplastic PBT UL 94V-0
扇叶材质 ImpellerThermoplastic PBT UL 94V-0
风扇单重 Weight202g(Weight:202g)




产品型号 Model	额定电压 Voltage	工作电压范围 Operating Voltage Range	额定电流 Rated Current	额定输入功率 Rated nput Pdwer	转速 Speed	最大风量 Maximum Air Flow		最大风压 Maximum Air Pressure		噪音 Noise
	VDC	VDC	Amp	Watt	RPM	m³/min	dB(A)	mm H2O	In H2O	dB(A)
HB9238X12X	12	8.0to13.5	0.28	3.36	3500	2.01	70.99	8.84	0.35	48
HB9238X24X	24	18to26.5	0.23	5.52						
HB9238X48X	48	36to54	0.1	4.8						
HB9238X12X	12	8.0to13.5	0.72	8.64	4500	2.45	86.38	12.76	0.50	56
HB9238X24X	24	18to26.5	0.41	9.84						
HB9238X48X	48	36to54	0.15	7.2						
HB9238X12X	12	8.0to13.5	1	12	5500	3.08	108.68	19.61	0.77	59.6
HB9238X24X	24	18to26.5	0.52	12.48						
HB9238X48X	48	36to54	0.25	12						
HB9238X12X	12	8.0to13.5	1.8	21.6	6500	3.75	132.58	28.58	1.13	63.6
HB9238X24X	24	18to26.5	0.88	21.12						
HB9238X48X	48	36to54	0.41	19.68						

外观尺寸 (mm)
Dimensions (mm)

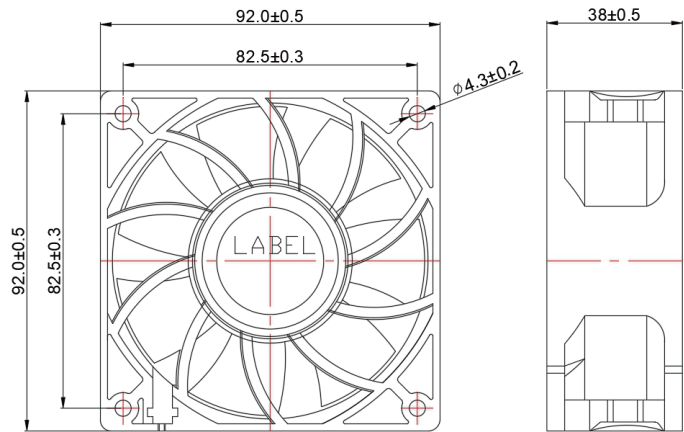

*For any customized design requirements regarding the above products, please contact KEXU sales

P-Q曲线
P-Q Curve

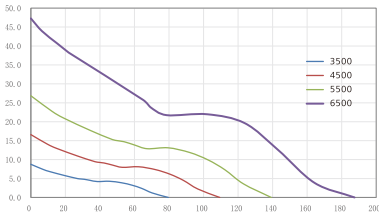

12025 DC FAN


轴承结构 Bearing system
外框材质 Framer
扇叶材质 Impeller
风扇单重 Weight

Ball or Sleeve
Thermoplastic PBT UL 94V-0
Thermoplastic PBT UL 94V-0
172g(Weight:172g)




产品型号 Model	额定电压 Voltage	工作电压范围 Operating Voltage Range	额定电流 Rated Current	额定输入功率 Rated nput Pdwer	转速 Speed	最大风量 Maximum Air Flow		最大风压 Maximum Air Pressure		噪音 Noise
	VDC	VDC	Amp	Watt	RPM	m³/min	dB(A)	mm H2O	In H2O	dB(A)
HB12025X12X	12	8.0to13.5	0.55	6.6	3500	2.82	99.72	10.65	0.42	53
HB12025X24X	24	18to26.5	0.30	7.2						
HB12025X48X	48	36to54	0.15	7						
HB12025X12X	12	8.0to13.5	0.70	84	4000	3.18	112.31	13.34	0.53	56
HB12025X24X	24	18to26.5	0.36	8.64						
HB12025X48X	48	36to54	0.17	8.16						
HB12025X12X	12	8.0to13.5	0.90	10.8	4500	3.59	126.81	16.68	0.66	60
HB12025X24X	24	18to26.5	0.46	11.04						
HB12025X48X	48	36to54	0.23	11.04						
HB12025X12X	12	8.0to13.5	1.35	16.2	5500	4.43	156.41	24.61	0.97	65
HB12025X24X	24	18to26.5	0.68	16.32						
HB12025X48X	48	36to54	0.34	16.32						
HB12025X12X	12	8.0to13.5	2.3	27.6	6500	5.34	188.48	31.9	1.26	69
HB12025X24X	24	18to26.5	1.1	26.4						
HB12025X48X	48	36to54	0.55	26.4						

■ 外观尺寸 (mm)
Dimensions (mm)

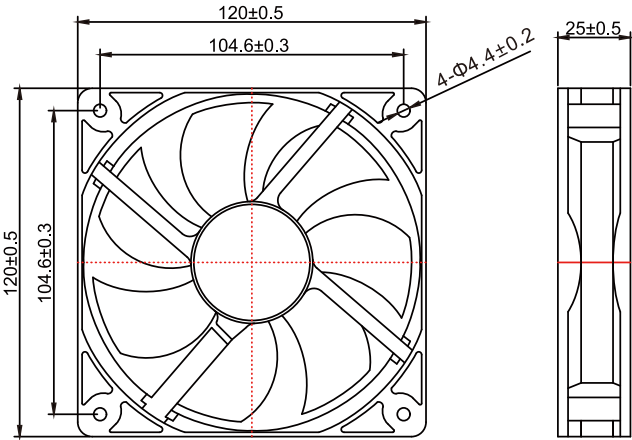

■ P-Q曲线
P-Q Curve

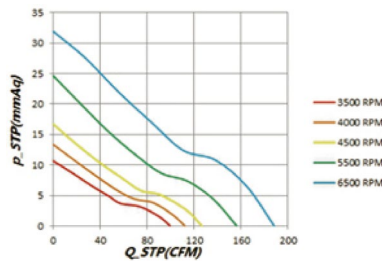

*For any customized design requirements regarding the above products, please contact KEXU sales

12038 DC FAN


轴承结构 Bearing system
外框材质 Framer
扇叶材质 Impeller
风扇单重 Weight

Ball or Sleeve
Thermoplastic PBT UL 94V-0
Thermoplastic PBT UL 94V-0
301.5g(Weight:301.5g)




产品型号 Model	额定电压 Voltage	工作电压范围 Operating Voltage Range	额定电流 Rated Current	额定输入功率 Rated nput Pdwer	转速 Speed	最大风量 Maximum Air Flow		最大风压 Maximum Air Pressure		噪音 Noise
	VDC	VDC	Amp	Watt	RPM	m³/min	dB(A)	mm H2O	In H2O	dB(A)
HB12038X05X	5	4.0to6.8	0.80	4	1500	1.57	55.61	2.9	0.11	31
HB12038X12X	12	8.0to13.5	0.32	3.84						
HB12038X24X	24	18to26.5	0.15	3.6						
HB12038X12X	12	8.0to13.5	0.50	6	2500	2.58	90.99	7.36	0.29	42.6
HB12038X24X	24	18to26.5	0.25	6						
HB12038X48X	48	36to54	0.12	5.76						
HB12038X12X	12	8.0to13.5	0.85	10.2	3500	3.84	135.71	13.16	0.52	54.5
HB12038X24X	24	18to26.5	0.41	9.84						
HB12038X48X	48	36to54	0.20	9.6						
HB12038X12X	12	8.0to13.5	1.50	18	4500	5.16	182.2	22.52	0.89	58.8
HB12038X24X	24	18to26.5	0.70	16.8						
HB12038X48X	48	36to54	0.35	16.8						
HB12038X12X	12	8.0to13.5	2.40	28.8	5500	6.25	220.84	33.29	1.31	63.1
HB12038X24X	24	18to26.5	1.15	27.6						
HB12038X48X	48	36to54	0.60	28.8						
HB12038X12X	12	8.0to13.5	4.0	48	6500	7.14	252.02	45.7	1.80	67.2
HB12038X24X	24	18to26.5	2.0	48						
HB12038X48X	48	36to54	1.0	48						

■ 外观尺寸 (mm)
Dimensions (mm)

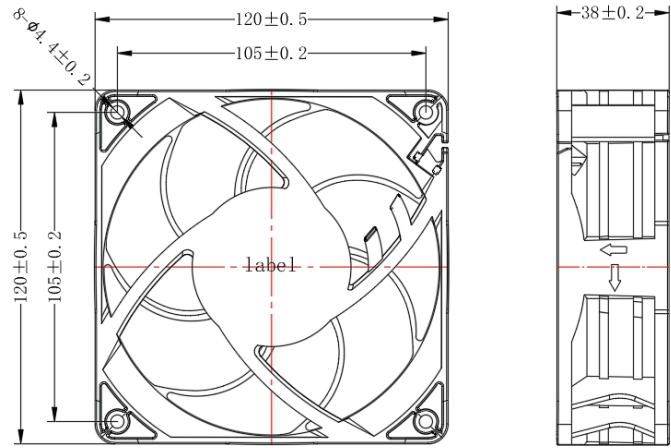

■ P-Q曲线
P-Q Curve

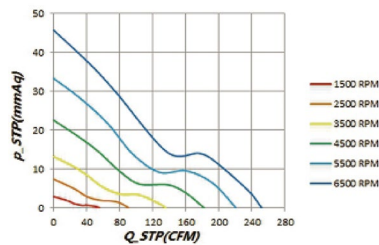

*For any customized design requirements regarding the above products, please contact KEXU sales


17238 DC FAN

轴承结构 Bearing system Two Ball
外框材质 Frame Thermoplastic PBT UL 94V-0
扇叶材质 Impeller Thermoplastic PBT UL 94V-0
风扇单重 Weight 900g(Weight:900g)



产品型号 Model	额定电压 Voltage	工作电压范围 Operating Voltage Range	额定电流 Rated Current	额定输入功率 Rated nput Pdwer	转速 Speed	最大风量 Maximum Air Flow		最大风压 Maximum Air Pressure		噪音 Noise
	VDC	VDC	Amp	Watt	RPM	m³/min	dB(A)	mm H2O	In H2O	dB(A)
HB17238X12X	12	6.0to13.2	2.1	25.2	3000	4.77	168.8	10.8	0.42	52
HB17238X24X	24	12to26.4	1.0	24						
HB17238X48X	48	36to56	0.5	24						
HB17238X12X	12	6.0to13.2	3.1	37.2	3500	5.57	196.9	12.6	0.49	57
HB17238X24X	24	12to26.4	1.5	36						
HB17238X48X	48	36to56	0.8	38.4						

外观尺寸 (mm)
Dimensions (mm)

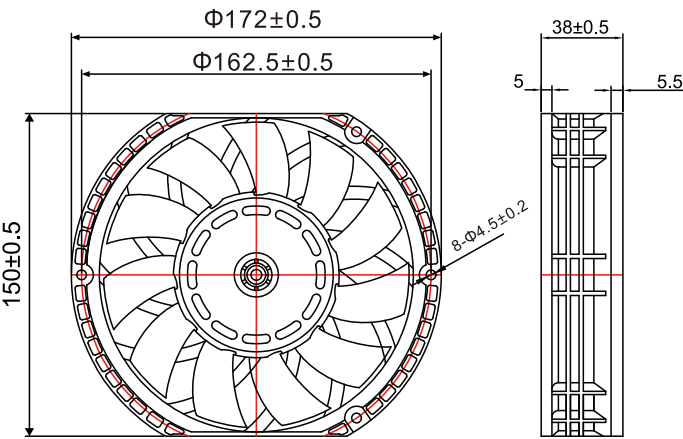

*For any customized design requirements regarding the above products, please contact KEXU sales


17251 DC FAN

轴承结构 Bearing system Ball or Sleeve
外框材质 Frame Aluminum ADC-12
扇叶材质 Impeller Thermoplastic PBT UL 94V-0
风扇单重 Weight 700g(Weight:700g)




产品型号 Model	额定电压 Voltage	工作电压范围 Operating Voltage Range	额定电流 Rated Current	额定输入功率 Rated nput Pdwer	转速 Speed	最大风量 Maximum Air Flow		最大风压 Maximum Air Pressure		噪音 Noise
	VDC	VDC	Amp	Watt	RPM	m³/min	dB(A)	mm H2O	In H2O	dB(A)
HB17251X12X	12	6to13.2	1.2	14.4	3000	5.84	210	13.5	0.53	55
HB17251X24X	24	12to26.4	0.6	14.4						
HB17251X48X	48	36to56	0.3	14.4						
HB17251X12X	12	6to13.2	1.6	20	3500	7.1	249.7	15.7	0.61	60
HB17251X24X	24	12to26.4	0.80	20						
HB17251X48X	48	36to56	0.4	20						
HB17251X12X	12	6to13.2	2.6	31	4000	8.0	285.3	17.9	0.70	68
HB17251X24X	24	12to26.4	1.3	31						
HB17251X48X	48	36to56	0.7	31						
HB17251X12X	12	6to13.2	5.0	60	5000	10.1	356.7	22.4	0.88	75
HB17251X24X	24	12to26.4	2.5	60						
HB17251X48X	48	36to56	1.7	60						

外观尺寸 (mm)
Dimensions (mm)

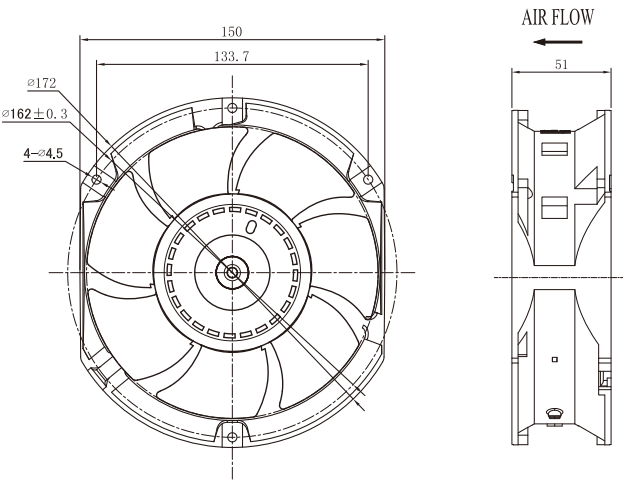

*For any customized design requirements regarding the above products, please contact KEXU sales

P-Q曲线
P-Q Curve

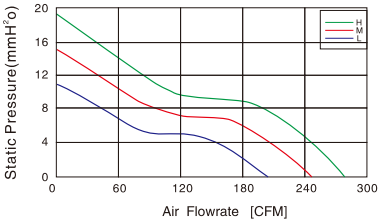

20060 DC FAN

轴承结构 Bearing system

外框材质 Framer

扇叶材质 Impeller

风扇单重 Weight

Ball or Sleeve

Aluminum ADC-13


Thermoplastic PBT UL 94V-0

1000g(Weight:1000g)



产品型号 Model	额定电压 Voltage	工作电压范围 Operating Voltage Range	额定电流 Rated Current	额定输入功率 Rated nput Pdwver	转速 Speed	最大风量 Maximum Air Flow		最大风压 Maximum Air Pressure		噪音 Noise
	VDC	VDC	Amp	Watt	RPM	m³/min	dB(A)	mm H2O	In H2O	dB(A)
HB20060X12X	12	8.0to13.5	0.8	9.60	1500	7.65	270.05	7.3	0.29	53.1
HB20060X24X	24	18to26.5	0.38	9.12						
HB20060X48X	48	36to54	0.18	8.64						
HB20060X12X	12	8.0to13.5	1.65	19.8	2000	9.17	324	10.62	0.42	58.6
HB20060X24X	24	18to26.5	0.78	18.82						
HB20060X48X	48	36to54	0.37	17.86						
HB20060X12X	12	8.0to13.5	2.92	35.04	2500	11.55	407.92	16.61	0.65	62.4
HB20060X24X	24	18to26.5	1.39	33.36						
HB20060X48X	48	36to54	0.66	31.68						
HB20060X12X	12	8.0to13.5	4.73	56.76	3000	13.94	492.43	22.69	0.89	68.5
HB20060X24X	24	18to26.5	2.25	54.0						
HB20060X48X	48	36to54	1.07	51.36						
HB20060X12X	12	8.0to13.5	7.4	88.8	3500	16.50	582.64	31.32	1.23	72.6
HB20060X24X	24	18to26.5	3.52	84.38						
HB20060X48X	48	36to54	1.67	80.16						

■ 外观尺寸 (mm)
Dimensions (mm)

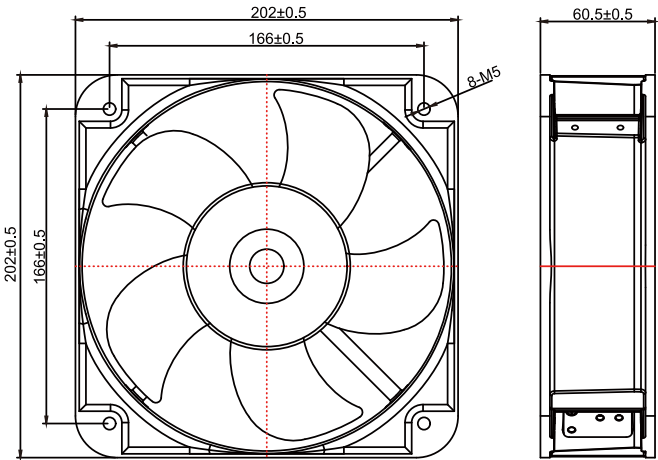

*For any customized design requirements regarding the above products, please contact KEXU sales

6025 EC FAN

轴承结构 Bearing system

外框材质 Frame

扇叶材质 Impeller

风扇单重 Weight

Ball or Sleeve

Thermoplastic PBT UL 94V-0


Thermoplastic PBT UL 94V-0

62g(Weight:62g)



产品型号 Model	额定电压 Voltage	工作电压范围 Operating Voltage Range	频率 Frequency	额定输入功率 Rated nput Pdwver	转速 Speed	最大风量 Maximum Air Flow		最大风压 Maximum Air Pressure		噪音 Noise
	VAC	VAC	Hz	Watt	RPM	m³/min	dB(A)	mm H2O	In H2O	dB(A)
HB6025XXX	110	80to135	50/60	1.0	4000	2.36	83.41	7.16	0.28	49
HB6025XXX	220	180to265	50/60	1.0						
HB6025XXX	110	80to135	50/60	2.2						
HB6025XXX	220	180to265	50/60	2.2	4500	2.63	92.99	8.79	0.35	53
HB6025XXX	110	80to135	50/60	2.5						
HB6025XXX	220	180to265	50/60	2.5						
HB6025XXX	110	80to135	50/60	3.0	5000	2.94	103.8	10.66	0.42	56.3
HB6025XXX	220	180to265	50/60	3.0						

■ 外观尺寸 (mm)
Dimensions (mm)

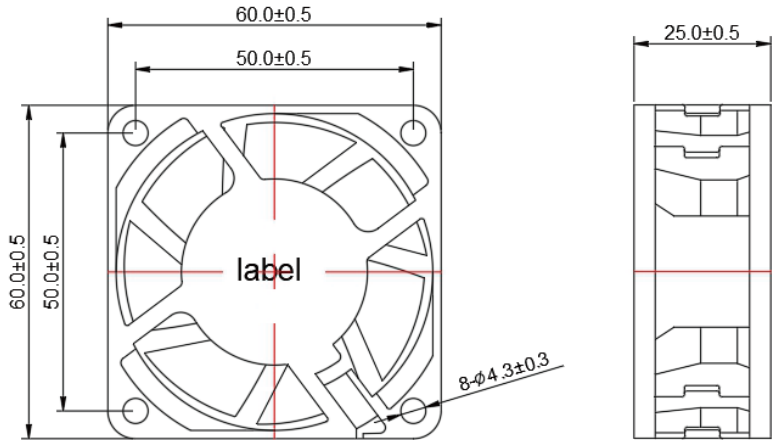

*For any customized design requirements regarding the above products, please contact KEXU sales


8025 EC FAN

轴承结构 Bearing system Ball or Sleeve
外框材质 Frame Thermoplastic PBT UL 94V-0
扇叶材质 Impeller Thermoplastic PBT UL 94V-0
风扇单重 Weight 78g(Weight:78g)




产品型号 Model	额定电压 Voltage	工作电压范围 Operating Voltage Range	频率 Frequency	额定输入功率 Rated nput Pdwer	转速 Speed	最大风量 Maximum Air Flow		最大风压 Maximum Air Pressure		噪音 Noise
	VAC	VAC	Hz	Watt	RPM	m³/min	dB(A)	mm H2O	In H2O	dB(A)
HB8025XXX	110	80to135	50/60	1.0	2500	0.86	30.54	2.6	0.1	28.9
HB8025XXX	220	180to265	50/60	1.0						
HB8025XXX	110	80to135	50/60	1.2	3500	1.0	36.5	3.6	0.14	34
HB8025XXX	220	180to265	50/60	1.2						
HB8025XXX	110	80to135	50/60	1.5	4000	1.37	48.5	6.1	0.24	41
HB8025XXX	220	180to265	50/60	1.5						
HB8025XXX	110	80to135	50/60	2.0	5000	1.71	60.7	8.4	0.33	46
HB8025XXX	220	180to265	50/60	2.0						

■ 外观尺寸 (mm)
Dimensions (mm)

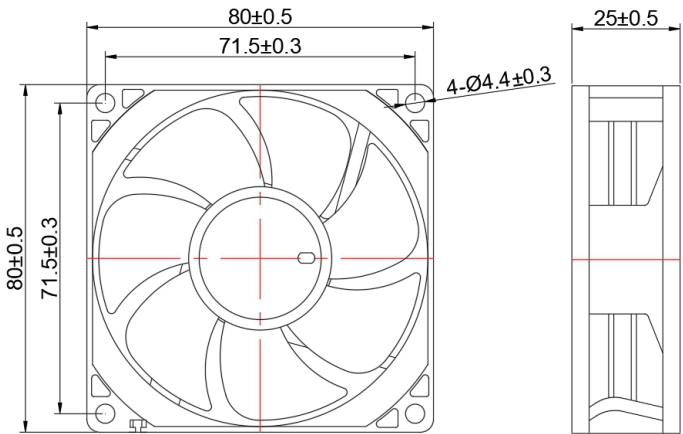

■ P-Q曲线
P-Q Curve

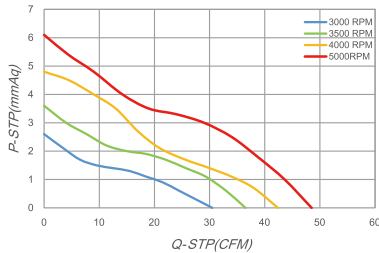

*For any customized design requirements regarding the above products, please contact KEXU sales


8038 EC FAN

轴承结构 Bearing system Ball or Sleeve
外框材质 Frame Thermoplastic PBT UL 94V-0
扇叶材质 Impeller Thermoplastic PBT UL 94V-0
风扇单重 Weight 177.6g(Weight:177.6g)




产品型号 Model	额定电压 Voltage	工作电压范围 Operating Voltage Range	频率 Frequency	额定输入功率 Rated nput Pdwer	转速 Speed	最大风量 Maximum Air Flow		最大风压 Maximum Air Pressure		噪音 Noise
	VAC	VAC	Hz	Watt	RPM	m³/min	dB(A)	mm H2O	In H2O	dB(A)
HB8038XXX	110	80to135	50/60	6.5	4000	1.42	50	8.1	0.32	45
HB8038XXX	220	180to265	50/60	6.5						
HB8038XXX	110	80to135	50/60	9.3	5500	1.94	68.5	13.9	0.55	54
HB8038XXX	220	180to265	50/60	9.3						
HB8038XXX	110	80to135	50/60	9.5	6000	2.12	75	16.5	0.65	56
HB8038XXX	220	180to265	50/60	9.5						

■ 外观尺寸 (mm)
Dimensions (mm)

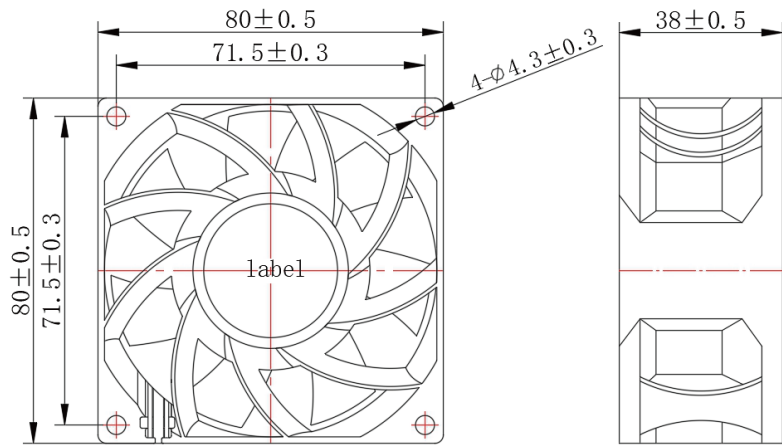

■ P-Q曲线
P-Q Curve

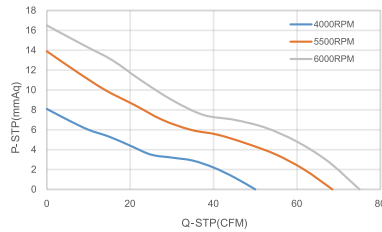

*For any customized design requirements regarding the above products, please contact KEXU sales


9225 EC FAN

轴承结构 Bearing system Ball or Sleeve
外框材质 Frame Thermoplastic PBT UL 94V-0
扇叶材质 Impeller Thermoplastic PBT UL 94V-0
风扇单重 Weight 102g(Weight:102g)




产品型号 Model	额定电压 Voltage	工作电压范围 Operating Voltage Range	频率 Frequency	额定输入功率 Rated input Power	转速 Speed	最大风量 Maximum Air Flow		最大风压 Maximum Air Pressure		噪音 Noise
	VAC	VAC	Hz	Watt	RPM	m³/min	dB(A)	mm H2O	In H2O	dB(A)
HB9225XXX	110	80to135	50/60	4.5	2500	1.2	41.3	3.1	0.12	33
HB9225XXX	220	180to265	50/60	4.5						
HB9225XXX	110	80to135	50/60	5.1	3500	1.64	58.1	5.6	0.22	43
HB9225XXX	220	180to265	50/60	5.1						
HB9225XXX	110	80to135	50/60	6.0	4500	2.08	73.5	8.6	0.24	49
HB9225XXX	220	180to265	50/60	6.0						

外观尺寸 (mm)
Dimensions (mm)

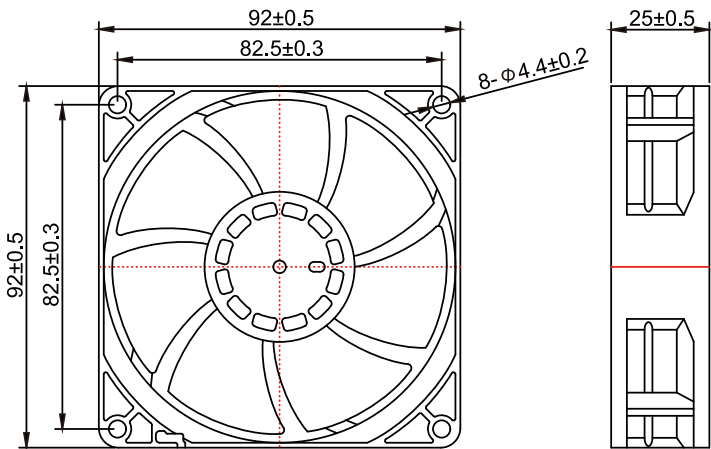

P-Q曲线
P-Q Curve

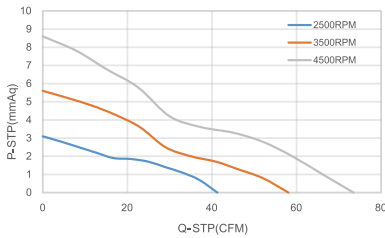

*For any customized design requirements regarding the above products, please contact KEXU sales


9238 EC FAN

轴承结构 Bearing system Ball or Sleeve
外框材质 Frame Thermoplastic PBT UL 94V-0
扇叶材质 Impeller Thermoplastic PBT UL 94V-0
风扇单重 Weight 202g(Weight:202g)




产品型号 Model	额定电压 Voltage	工作电压范围 Operating Voltage Range	频率 Frequency	额定输入功率 Rated input Power	转速 Speed	最大风量 Maximum Air Flow		最大风压 Maximum Air Pressure		噪音 Noise
	VAC	VAC	Hz	Watt	RPM	m³/min	dB(A)	mm H2O	In H2O	dB(A)
HB9238XXX	110	80to135	50/60	6.8	2500	1.39	49.3	8.9	0.35	45
HB9238XXX	220	180to265	50/60	6.8						
HB9238XXX	110	80to135	50/60	8.2	3000	1.67	59.2	10.7	0.42	48
HB9238XXX	220	180to265	50/60	8.2						
HB9238XXX	110	80to135	50/60	10	4000	2.23	79	14.2	0.55	54
HB9238XXX	220	180to265	50/60	10						
HB9238XXX	110	80to135	50/60	13	5000	2.79	98.8	17.8	0.70	57
HB9238XXX	220	180to265	50/60	13						

外观尺寸 (mm)
Dimensions (mm)

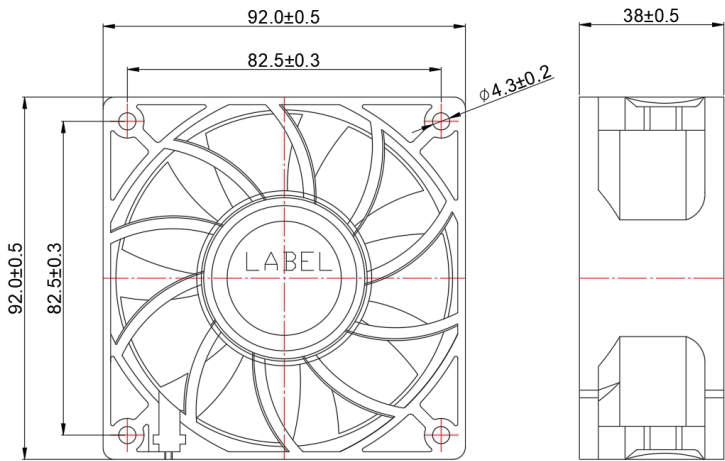

P-Q曲线
P-Q Curve

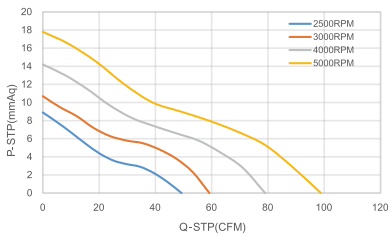

*For any customized design requirements regarding the above products, please contact KEXU sales

12025 EC FAN

轴承结构 Bearing system

外框材质 Frame

扇叶材质 Impeller

风扇单重 Weight

Ball or Sleeve

Thermoplastic PBT UL 94V-0


Thermoplastic PBT UL 94V-0

172g(Weight:172g)




产品型号 Model	额定电压 Voltage	工作电压范围 Operating Voltage Range	频率 Frequency	额定输入功率 Rated nput Pdwer	转速 Speed	最大风量 Maximum Air Flow		最大风压 Maximum Air Pressure		噪音 Noise
	VAC	VAC	Hz	Watt	RPM	m³/min	dB(A)	mm H2O	In H2O	dB(A)
HB12025XXX	110	80to135	50/60	4.1	2500	2.12	75	5.2	0.2	40
HB12025XXX	220	180to265	50/60	4.1						
HB12025XXX	110	80to135	50/60	4.5	3000	2.54	90	6.3	0.24	43
HB12025XXX	220	180to265	50/60	4.5						
HB12025XXX	110	80to135	50/60	5.0	3500	2.97	105	7.3	0.28	46
HB12025XXX	220	180to265	50/60	5.0						

外观尺寸 (mm)
Dimensions (mm)

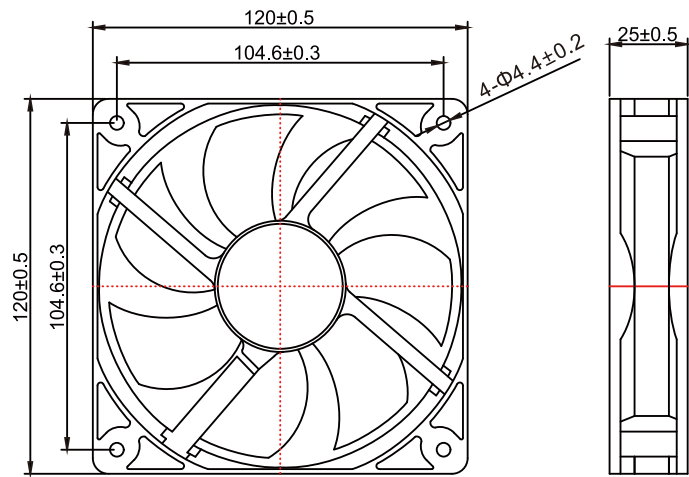

P-Q曲线
P-Q Curve

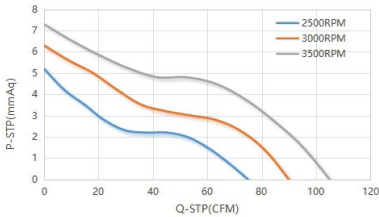

*For any customized design requirements regarding the above products, please contact KEXU sales

12038 EC FAN

轴承结构 Bearing system

外框材质 Frame

扇叶材质 Impeller

风扇单重 Weight

Ball or Sleeve

Thermoplastic PBT UL 94V-0


Thermoplastic PBT UL 94V-0

301.5g(Weight:301.5g)




产品型号 Model	额定电压 Voltage	工作电压范围 Operating Voltage Range	频率 Frequency	额定输入功率 Rated nput Pdwer	转速 Speed	最大风量 Maximum Air Flow		最大风压 Maximum Air Pressure		噪音 Noise
	VAC	VAC	Hz	Watt	RPM	m³/min	dB(A)	mm H2O	In H2O	dB(A)
HB12038XXX	110	80to135	50/60	15	3500	3.45	122	6.5	0.25	52
HB12038XXX	220	180to265	50/60	15						

外观尺寸 (mm)
Dimensions (mm)

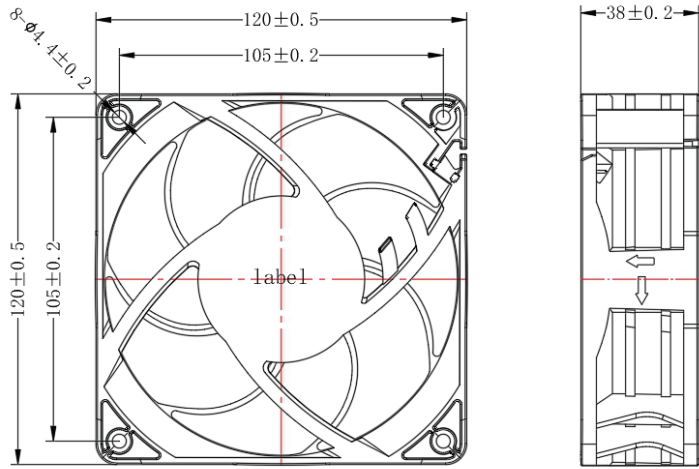

P-Q曲线
P-Q Curve

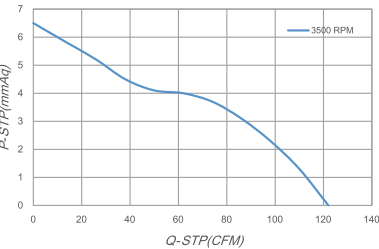

*For any customized design requirements regarding the above products, please contact KEXU sales

17251 EC FAN

轴承结构 Bearing system

外框材质 Frame

扇叶材质 Impeller

风扇单重 Weight

Ball or Sleeve

Aluminum ADC-12

Thermoplastic PBT UL 94V-0

700g(Weight:700g)




产品型号 Model	额定电压 Voltage	工作电压范围 Operating Voltage Range	频率 Frequency	额定输入功率 Rated input Power	转速 Speed	最大风量 Maximum Air Flow		最大风压 Maximum Air Pressure		噪音 Noise
	VAC	VAC	Hz	Watt	RPM	m³/min	dB(A)	mm H2O	In H2O	dB(A)
HB17251XXX	110	80to135	50/60	24	3000	6.0	211.5	18.3	0.72	62
HB17251XXX	220	180to265	50/60	24						
HB17251XXX	110	80to135	50/60	27	3500	6.9	246.7	21.4	0.84	63
HB17251XXX	220	180to265	50/60	27						
HB17251XXX	110	80to135	50/60	31	4000	7.98	282	24.5	0.96	65
HB17251XXX	220	180to265	50/60	31						

FAN AND FILTER UNITS




FAN ACCESSORIES


■ 外观尺寸 (mm)
Dimensions (mm)

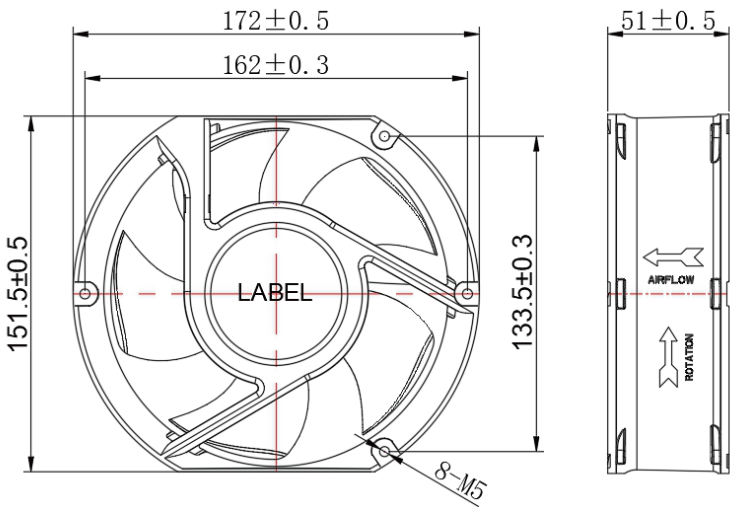

■ P-Q曲线
P-Q Curve

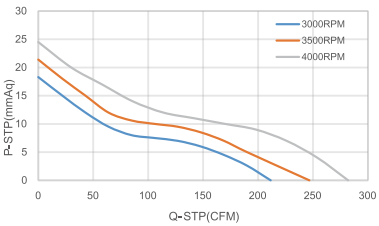


■ THREE-IN-ONE DUST-PROOF COVER
For 40-200mm fans

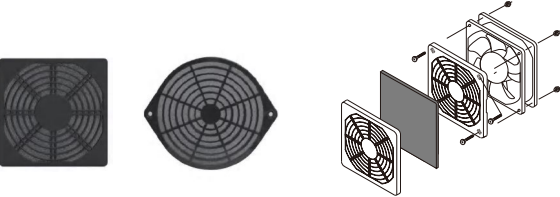


■ Plastic Fan Guard
For 80-254mm fans



■ Aluminum Screen Filter
For 40-200mm fans

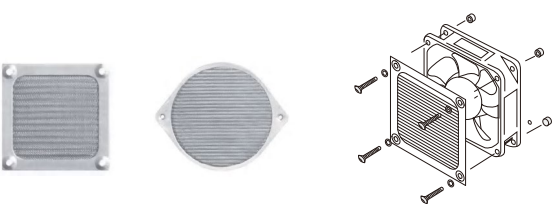

■ Metal Fan Guard
For 80-254mm fans

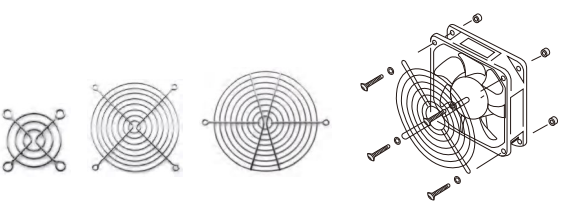

*For any customized design requirements regarding the above products, please contact KEXU sales

*For any customized design requirements regarding the above products, please contact KEXU sales

THREE-IN-ONE DUST-PROOF COVER








- 通风网本体材质: 耐燃级ABS树脂
 - 滤网材质: 尼龙纤维合成树脂
 - 使用范围: 屋内-10~+55
 - 除尘率: 89%
 - 防护等级: IP40
- Material of the ventilator: Flame Retardant ABS Resin


Material of filter screen: resin mixed with nylon fiber

Scope: room temperature from -10to +55


Dust removal rate: 89%

IP code: IP40

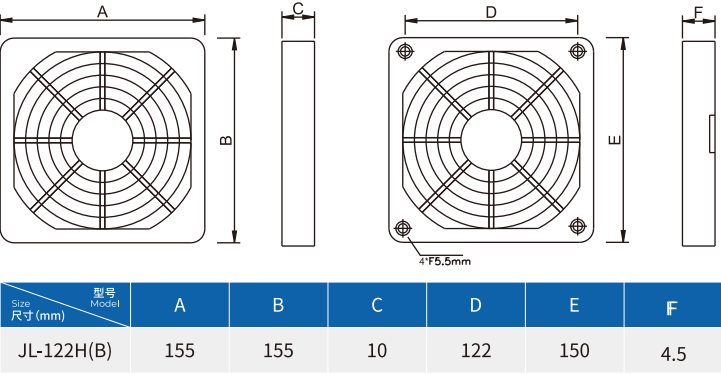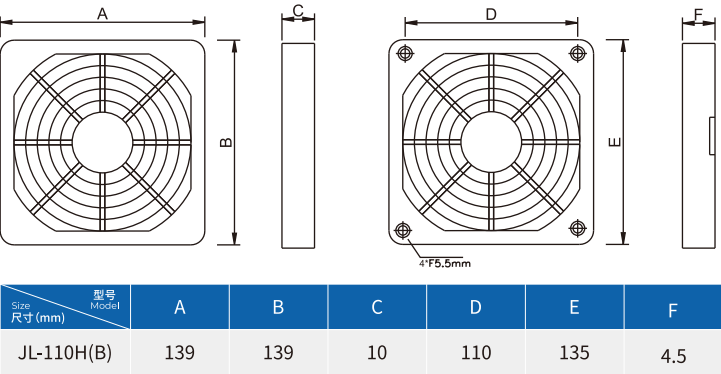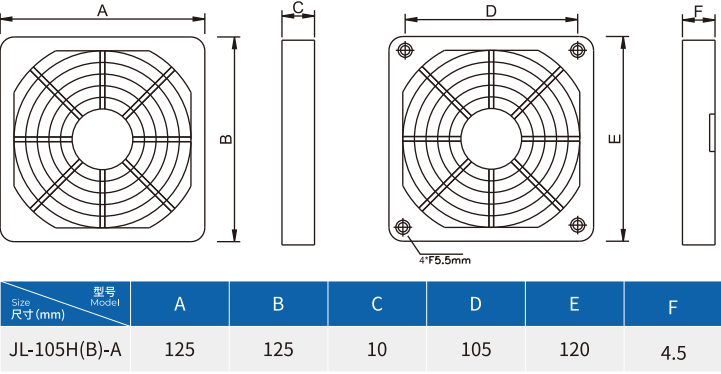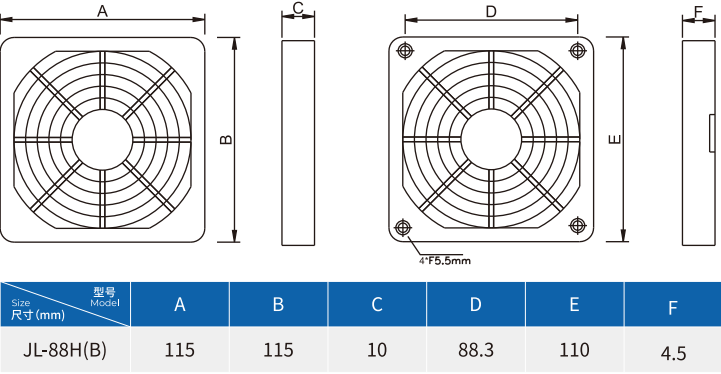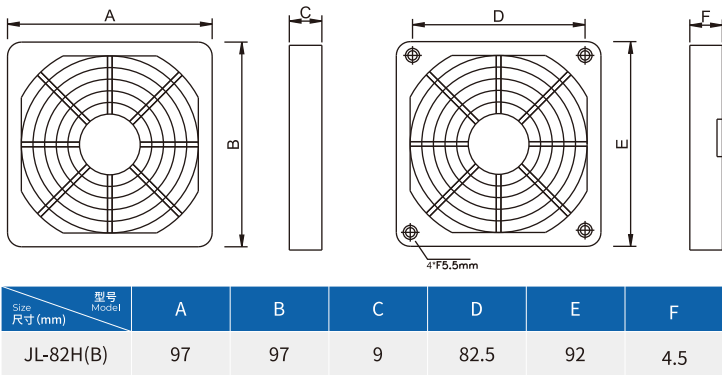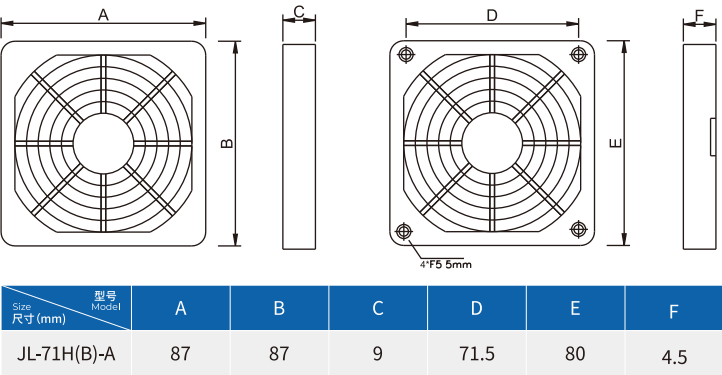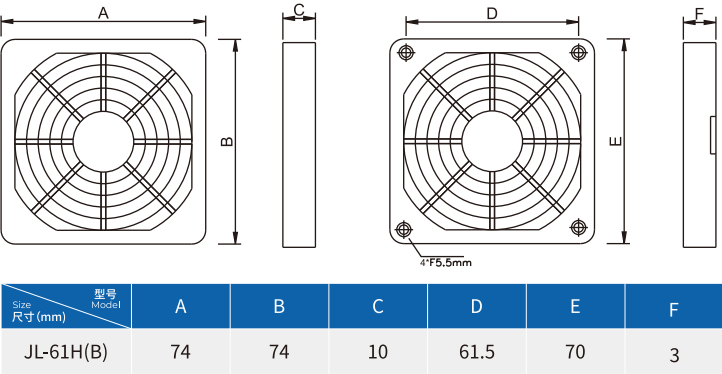


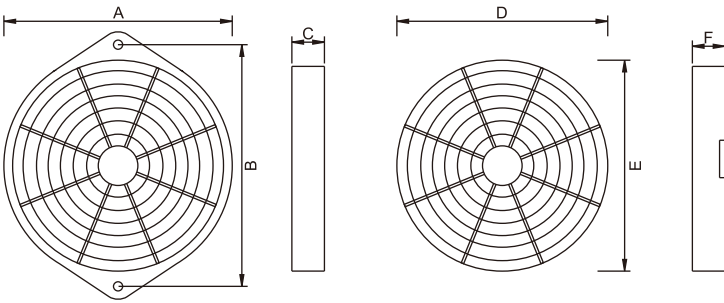

Size 尺寸 (mm)	型号 Model	A	B	C	D	E	F
	JL-150H(B)-B	150	162	7	150	150	4.5


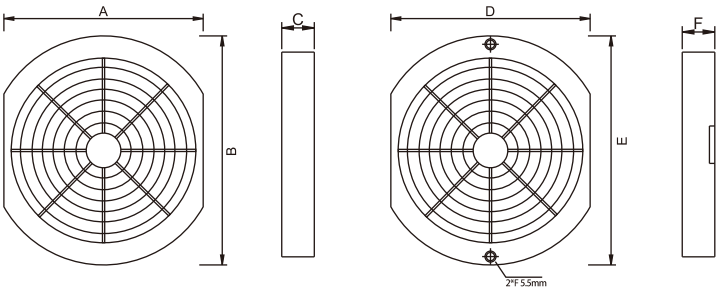


Size 尺寸 (mm)	型号 Model	A	B	C	D	E	F
	JL-162H(B)-Y	155	177	10	150	162	4.5

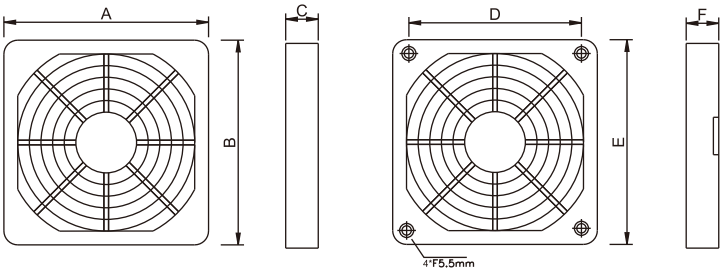


Size 尺寸 (mm)	型号 Model	A	B	C	D	E	F
	JL-166H(B)	206	206	10	166	200	4.5


PLASTIC FAN GUARD

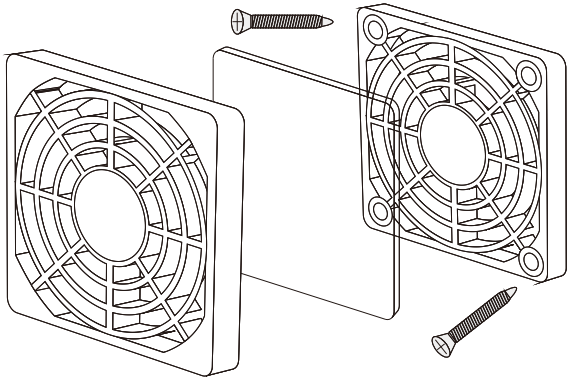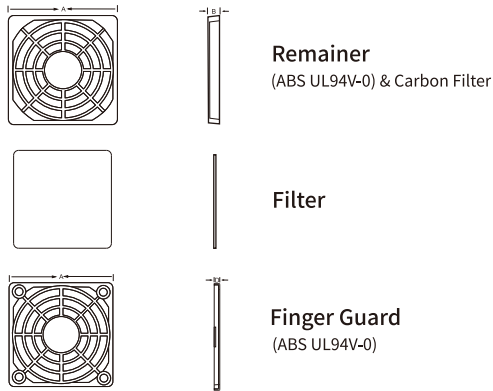


▪ JL-06 For 60mm Fan

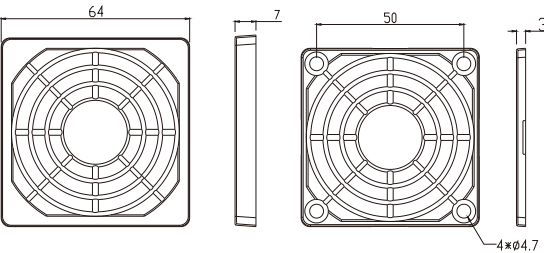


▪ JL-08 For 80mm Fan

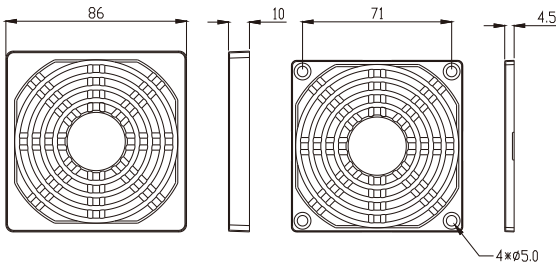


▪ JL-09 For 92mm Fan

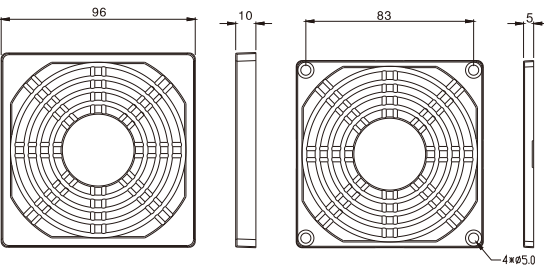

▪ JL-12 For 120mm Fan

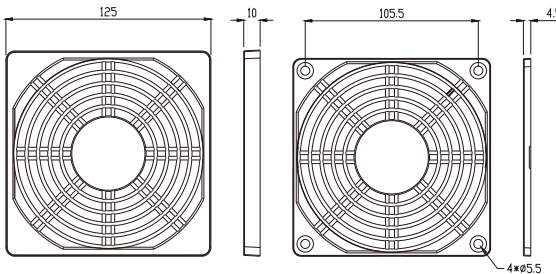


▪ JL-15 For 150mm Fan

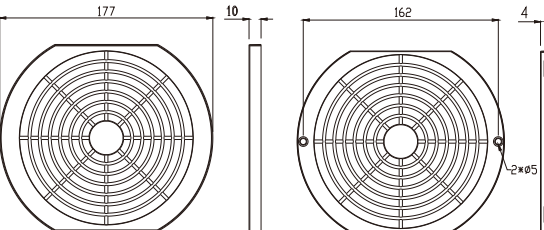


METAL FAN GUARD


▪ JL-40 For 40mm Fan

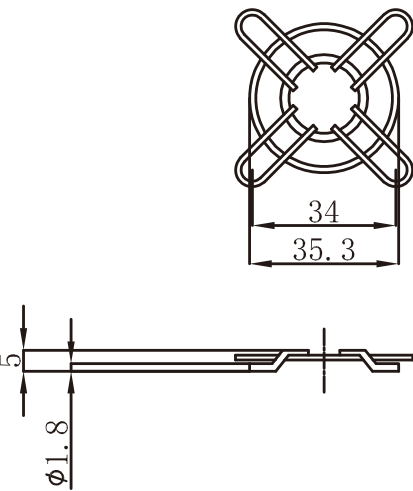


▪ JL-50 For 50mm Fan

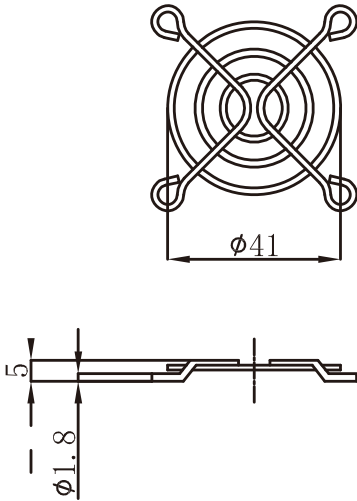


▪ JL-92 For 92mm Fan

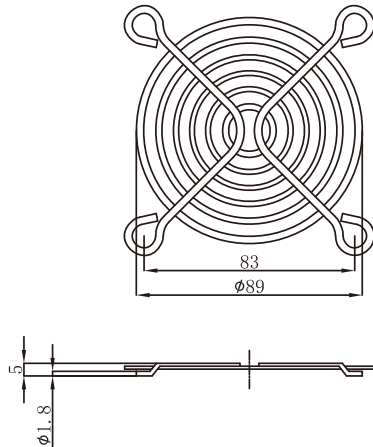


▪ JL-110 For 110mm Fan

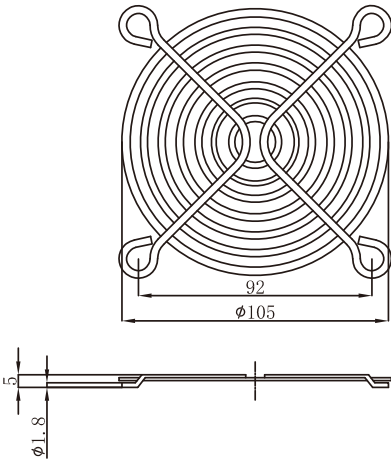


▪ JL-60 For 60mm Fan

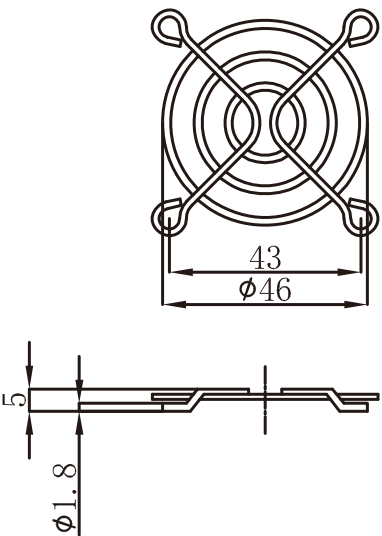


▪ JL-80 For 80mm Fan

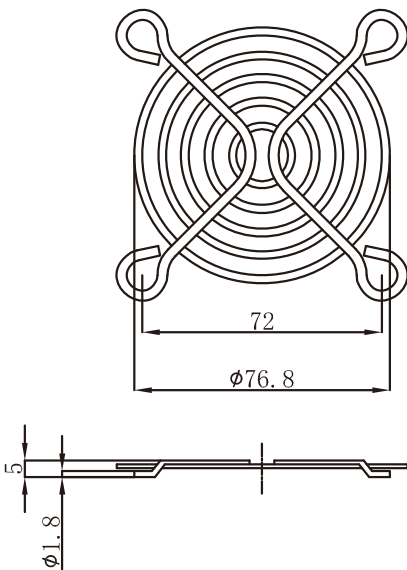


▪ JL-120 For 120mm Fan

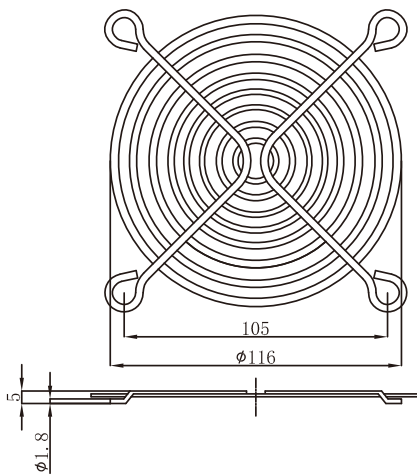


▪ JL-135 For 135mm Fan

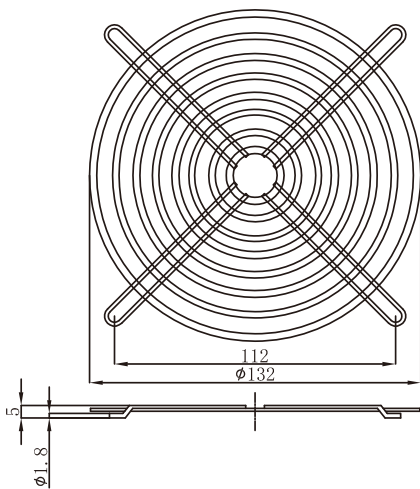


▪ JL-170 For 170mm Fan

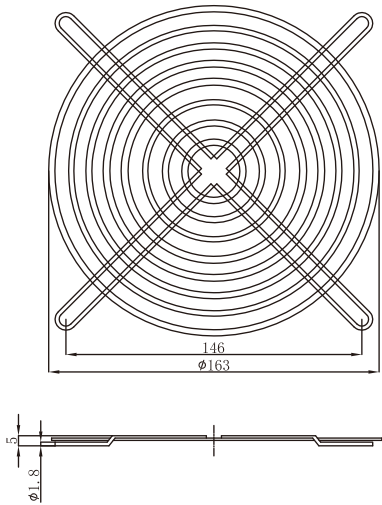


▪ JL-150 For 150mm Fan

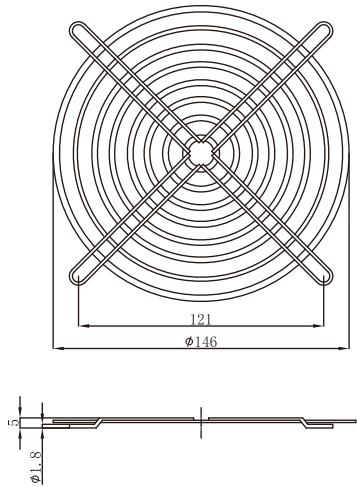


▪ JL-200 For 200mm Fan

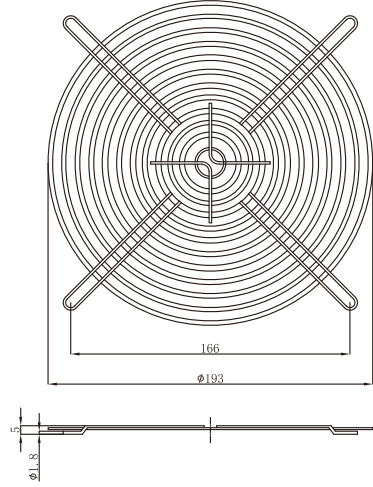


▪ JL-220 For 220mm Fan

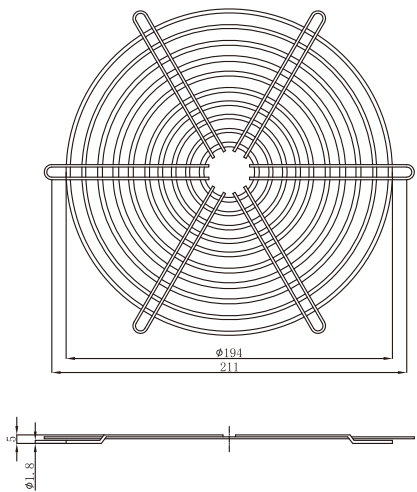


▪ JL-160 For 160mm Fan

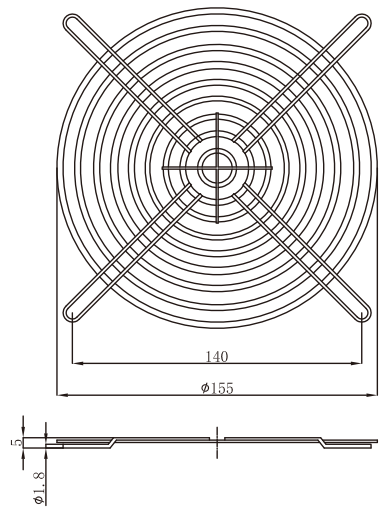


▪ JL-180 For 180mm Fan

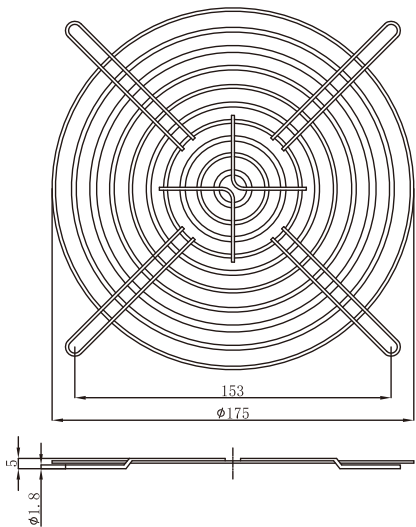

▪ JL-250 For 250mm Fan

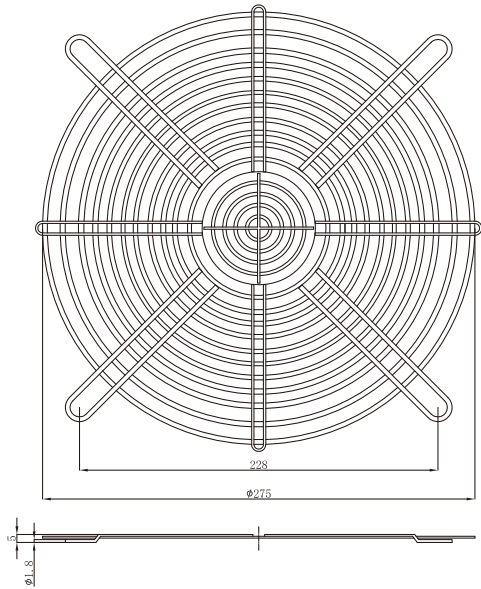

▪ JL-300 For 300mm Fan

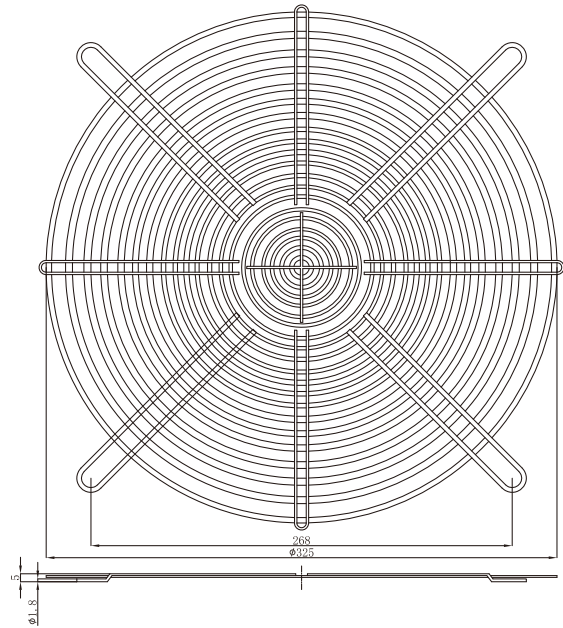


VENTILATION SYSTEM HB-801

注:适用于HB8025HBL风机配套使用。



■ 使用安装方法
Use the installation method

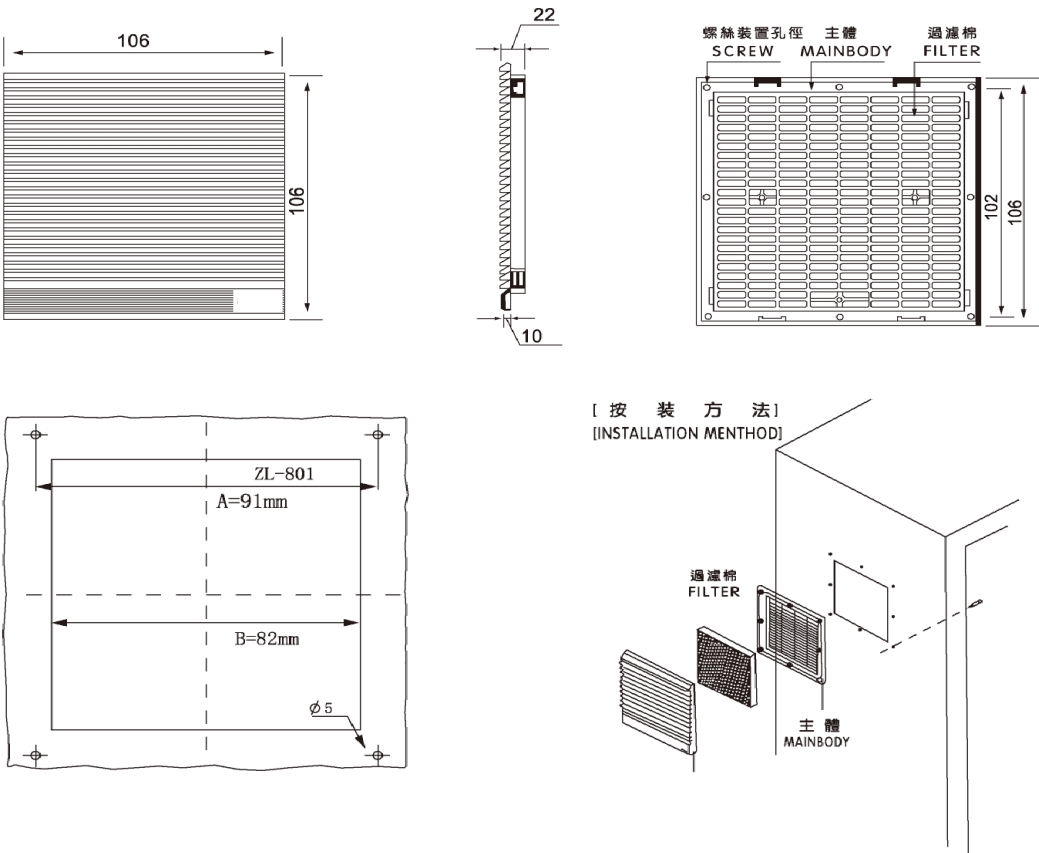


VENTILATION SYSTEM HB-802

注:适用于HB9225HBL风机配套使用。



■ 使用安装方法
Use the installation method



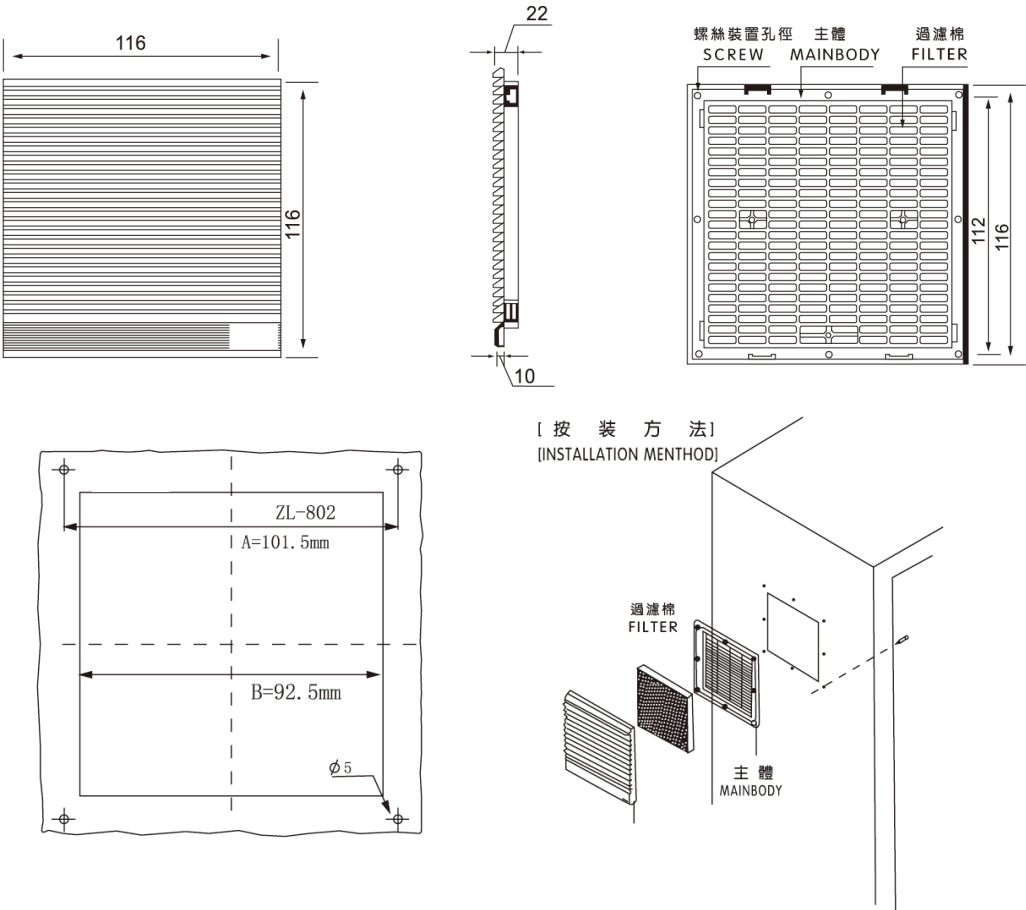


VENTILATION SYSTEM HB-803

注:适用于HB11025HBL、HB12038HBL风机配套使用。




- 使用安装方法
Use the installation method

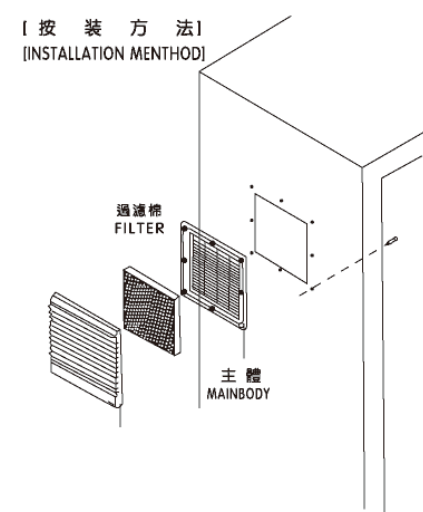
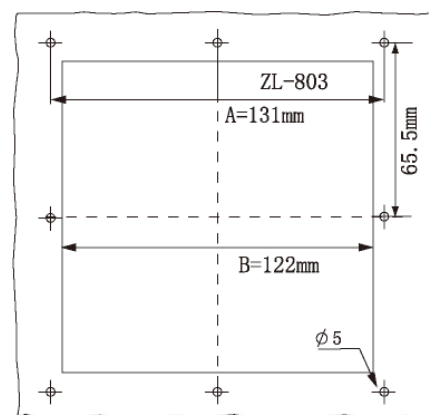
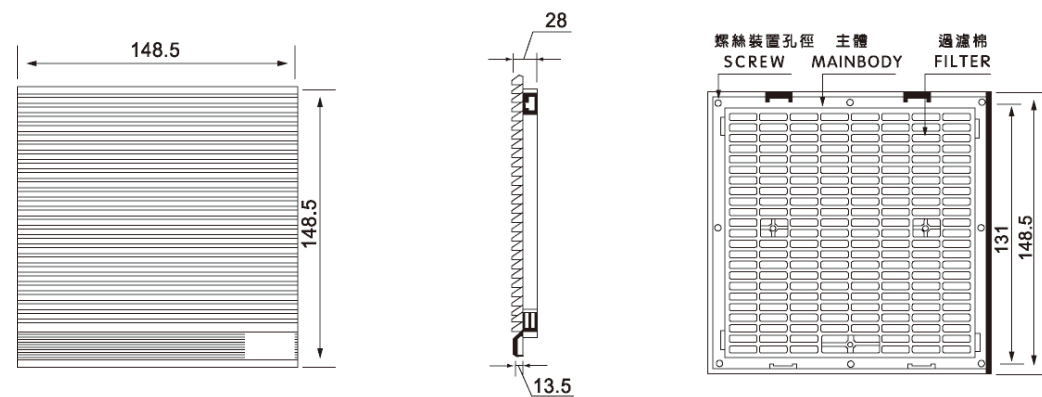


VENTILATION SYSTEM HB-804

注:适用于HB12038HBL、HB15050HBL、HB17050HBL风机配套使用。

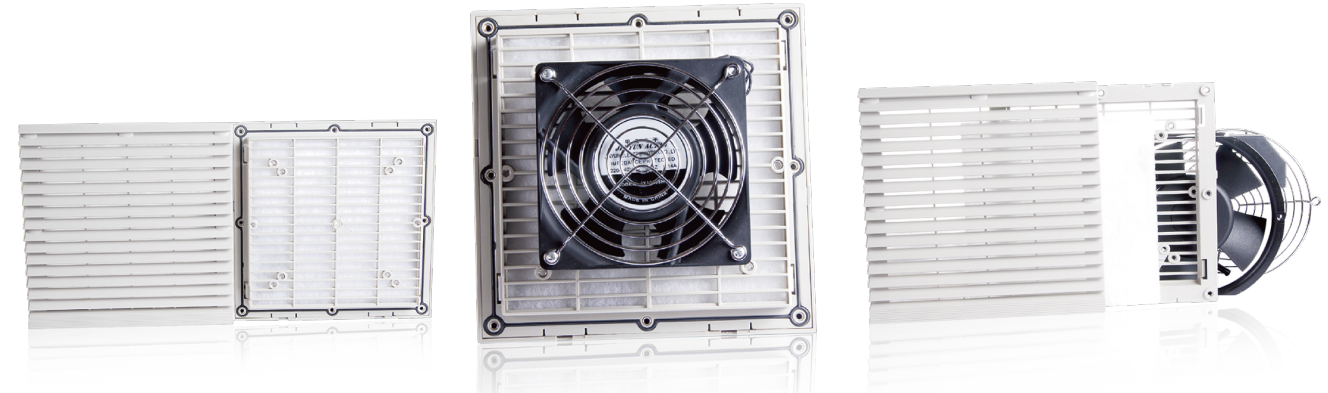

- 使用安装方法
Use the installation method

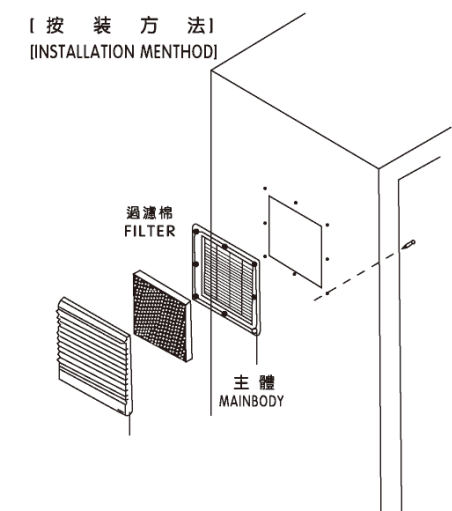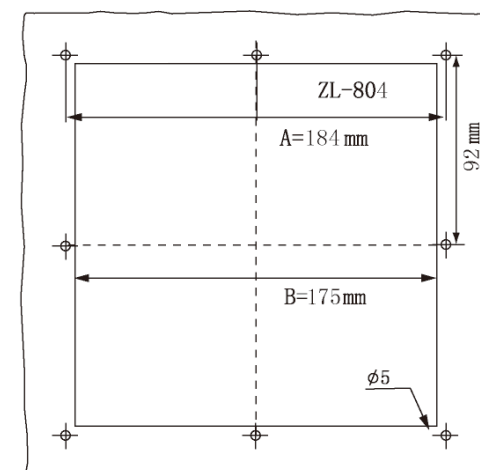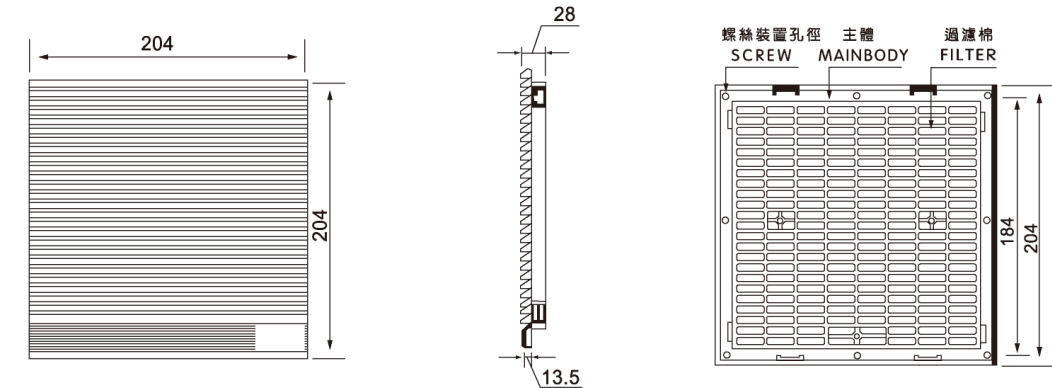


VENTILATION SYSTEM HB-805

注:适用于HB17050HBL、HB18060HBL、HB20060HBL、HB22060HBL风机配套使用。



■ 使用安装方法
Use the installation method

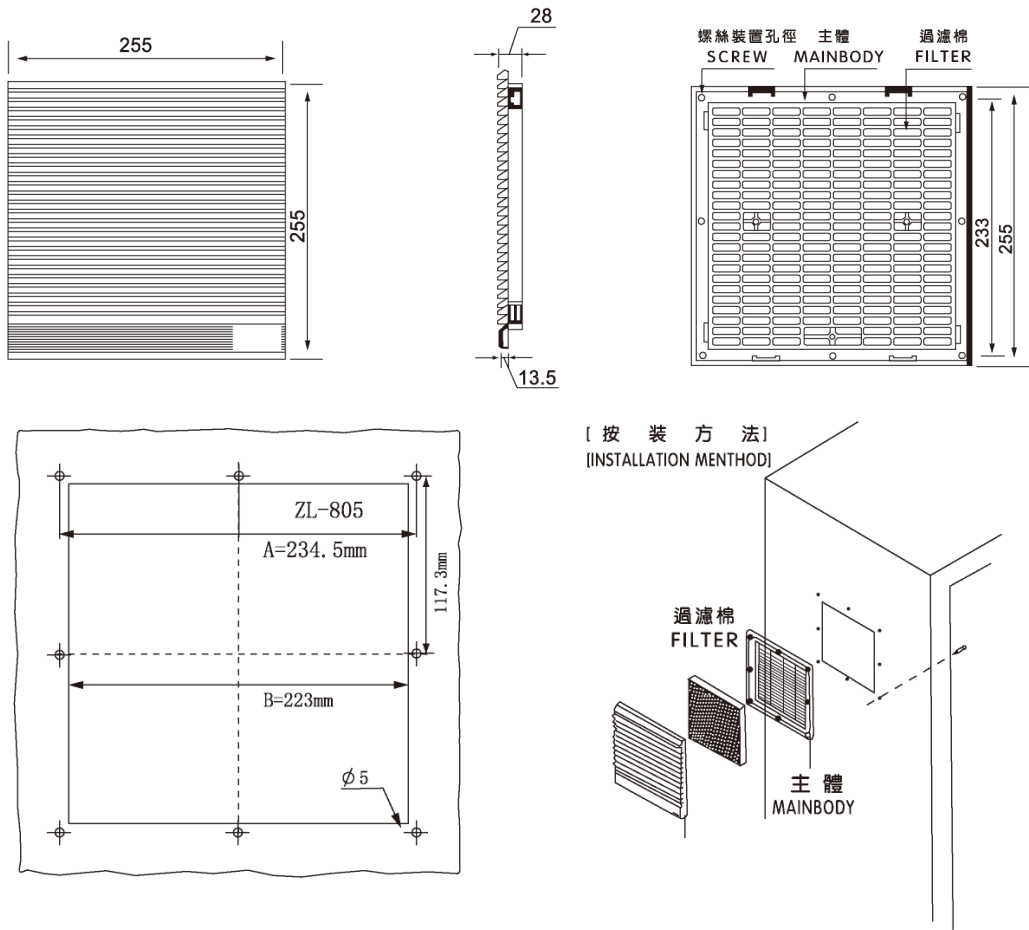

VENTILATION SYSTEM HB-806

注:适用于HB18060HBL、HB20060HBL、HB22060HBL、HB20572HBL、HB25489HBL多种风机配套使用。



■ 使用安装方法
Use the installation method

